


Connectors (Continued)

Right angle pin header board mount with male contacts

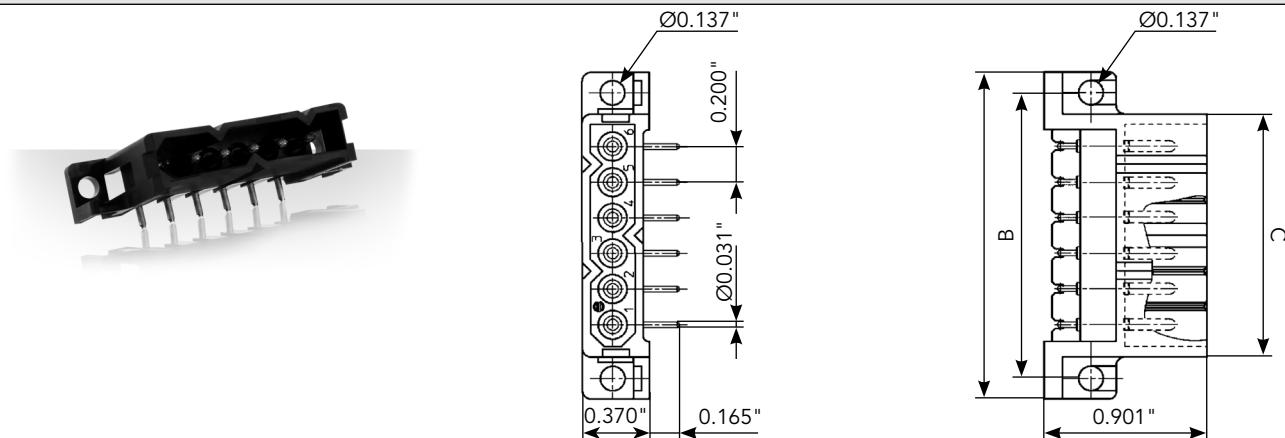


Part number		Nbr. of contact	A	B	C
Solid machined contacts	Stamped & formed contacts				
SMS3PH3*	SMS3PHGE6	3	1.228"	1.000"	0.759"
SMS4PH3*	SMS4PHGE6	4	1.429"	1.196"	0.960"
SMS6PH3*	SMS6PHGE6	6	1.830"	1.598"	1.358"
SMS9PH3*	SMS9PHGE6	9	2.429"	2.200"	1.960"
SMS10PH3*	SMS10PHGE6	10	2.629"	2.401"	2.161"

* for coding plating see page 15

Example: SMS9PH3J9 - SMS with 9 solid machined contacts, plating J9

Straight pin header board mount with male contacts

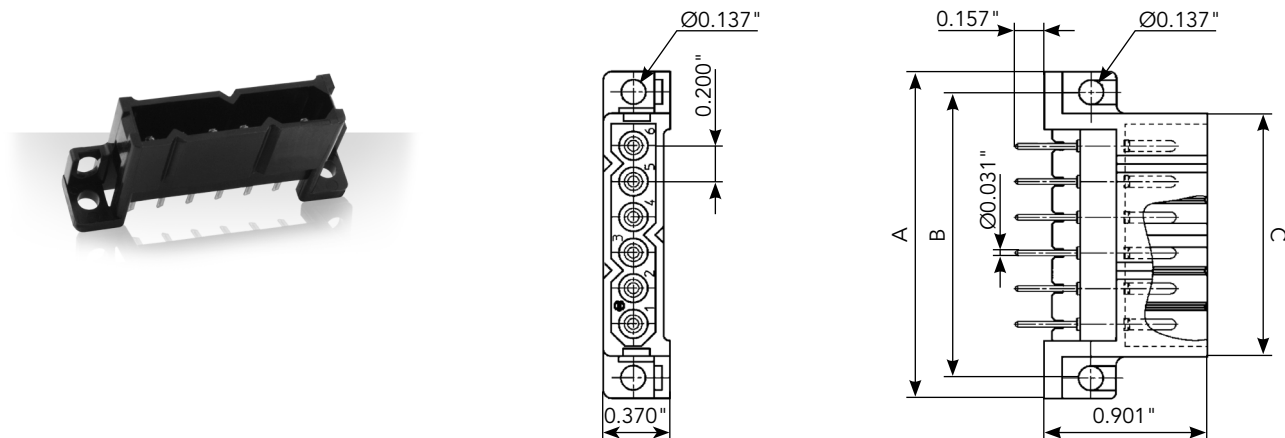

Part number		Nbr. of contact	A	B	C
Solid machined contacts	Stamped & formed contacts				
SMS3PH4*	SMS3PHGE4	3	1.228"	1.000"	0.759"
SMS4PH4*	SMS4PHGE4	4	1.429"	1.196"	0.960"
SMS6PH4*	SMS6PHGE4	6	1.830"	1.598"	1.358"
SMS9PH4*	SMS9PHGE4	9	2.429"	2.200"	1.960"
SMS10PH4*	SMS10PHGE4	10	2.629"	2.401"	2.161"

* for coding plating see brochure

Example: SMS9PH4J9 - SMS with 9 solid machined contacts, plating J9

Note: all dimensions are in inches