


RM14M30K *	4	MALE CONTACT DIAMETER 1.6 FOR CABLE 2.50 mm ²
RM16M23K *	4	MALE CONTACT DIAMETER 1.6 FOR CABLE 0.5 A 1.50 mm ²
N/A	3	FOOLPROOF DEVICE (1 pawn min)
N/A	2	INDIVIDUAL GROMMET **
N/A	1	RECEPTACLE BODY
REFERENCE REPERE		DESIGNATION

MATERIAL:

- Receptacle : Thermoplastic
- Individual grommet : Silicone (only on sealed versions)
- Foolproof device : thermoplastic.

CHARACTERISTICS:

- Câbles éligibles : Ø max of shaft 3.8mm, Ø min of shaft 1.15mm
- Diameter of male contact : Ø 1.6mm
- Contact resistance: 3250V AC
- Eligible current : 15A max.
- Insulation strenght : > 5000MΩ
- Temperature of use : -50°C/+100°C
- Degres of protection : IP 67 only for sealed versions .
- Corrosion resistance : 500H salt fog, Coupling connector.
- Number of keying: 2+1 universal position
- Number of cycles : 500 cycles.

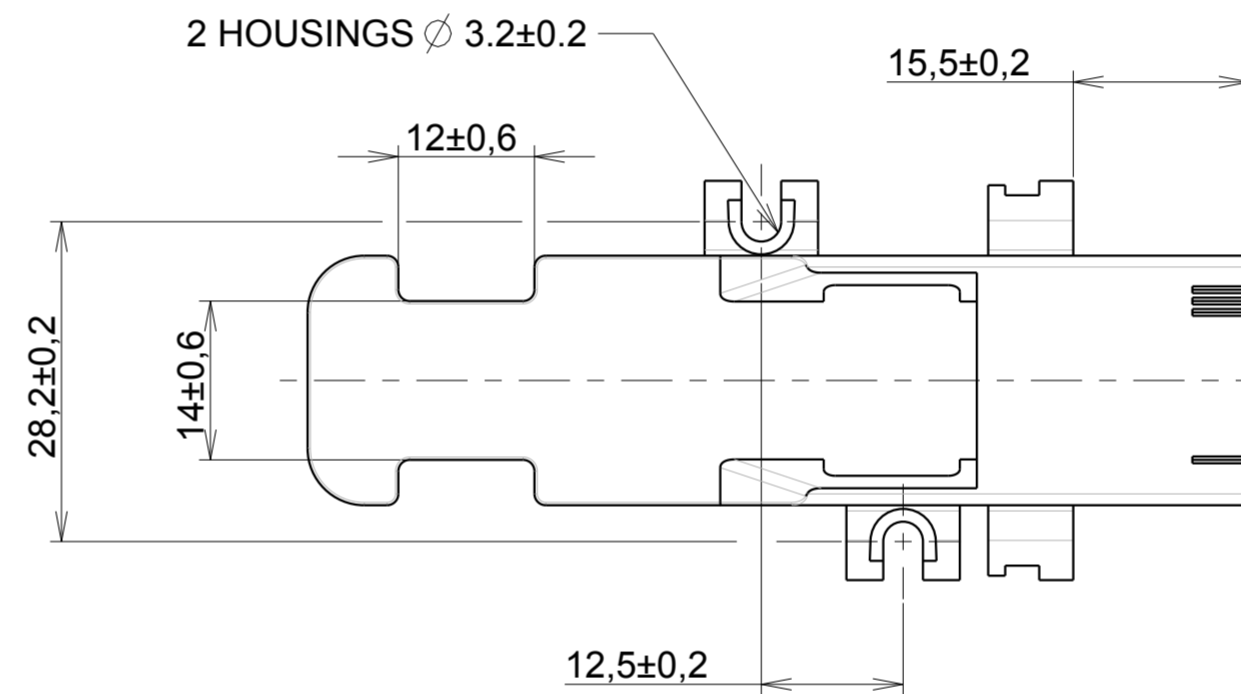


For all assembly information, see Technical Bulletin : BT 267.


* contacts soldered separately

**Connector Reference :
Sealed Version : SMS3RIP67
No sealed Version : SMS3RIP20


2 TYPES OF BOLTED JOINT ASSEMBLY

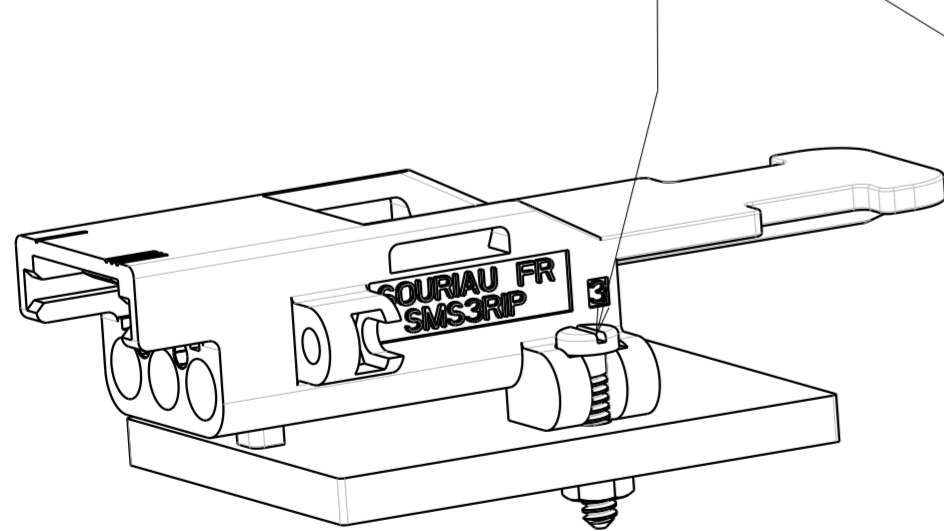

MOUNTING EVEN ON WALL

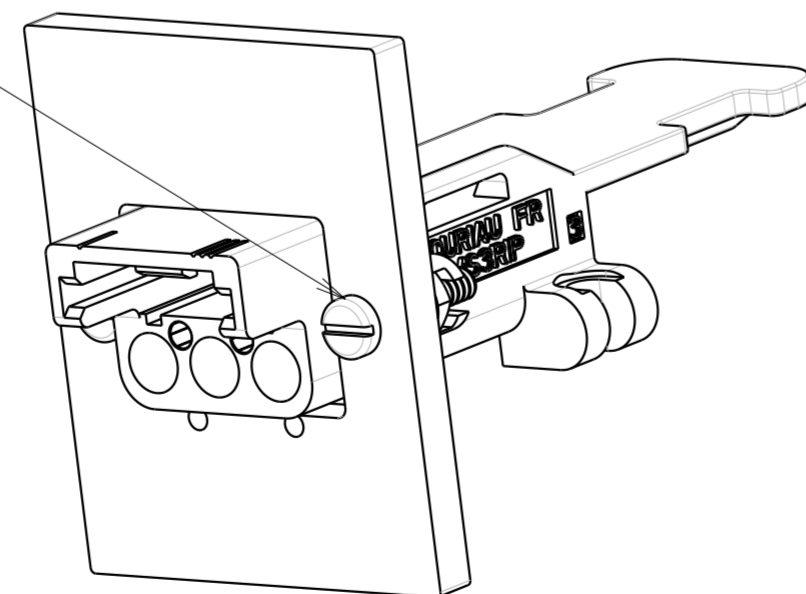

MOUNTING ACCROSS WALL

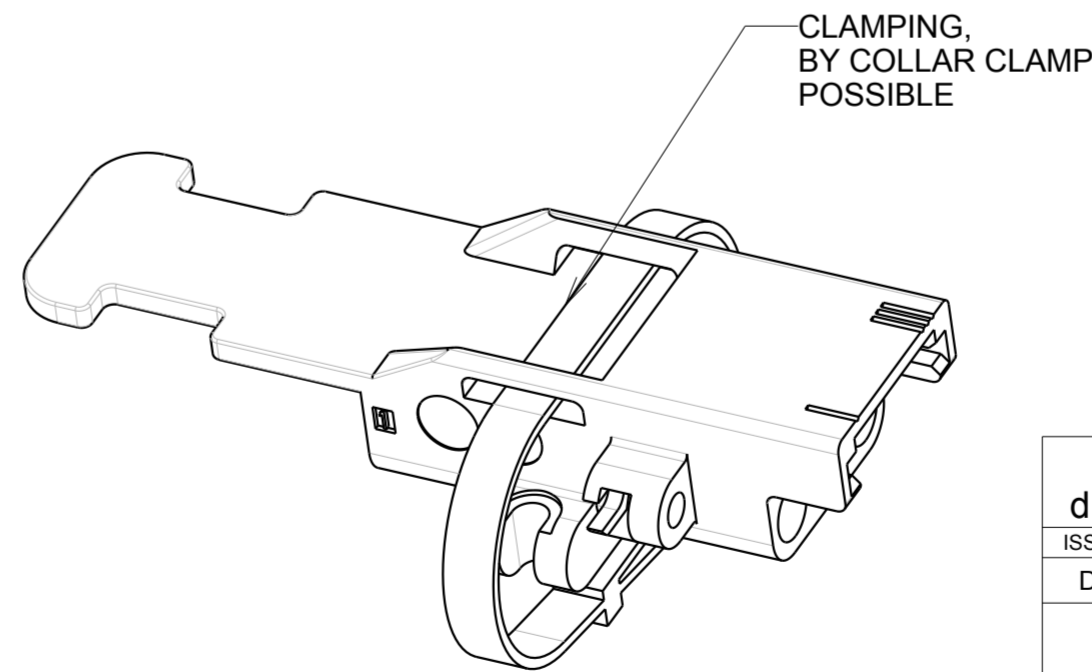

CLAMPING, BY COLLAR CLAMP POSSIBLE


SCALE 3/2

P/N : SMS3RIP**


d	21/05/14	ADD sheet 2 for cavities help and translate drawing in english		23552
ISS	DATE	Latest modification - by: BERTHOME A.		MOD N°
Designed by: SORIN V.		Date: 27/09/11	CUSTOMER DRAWING	
TITLE		RECTANGULAR RECEPTACLE SMS IP SMS IP 3 POINTS		
Scale	3/2	General linear Tolerances: ± 0.2	NPRDS / PROJECT	
SOURIAU		WWW.SOURIAU.COM		This document is the property of SOURIAU. It must not be reproduced or communicated without permission
FORMAT	A2	SOURIAU DRG N° REC1-0006A-C		SHEET 1/2

HELP FOR CAVITIES IDENTIFICATION


LEFT VIEW

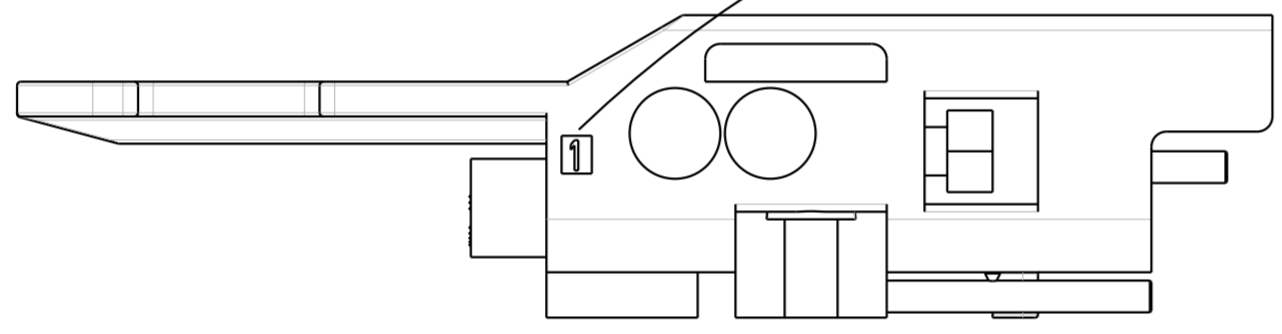

REAR VIEW

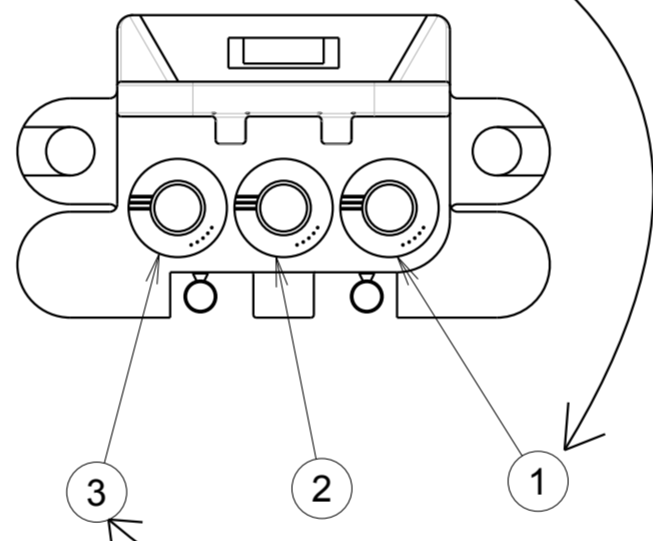

RIGHT VIEW

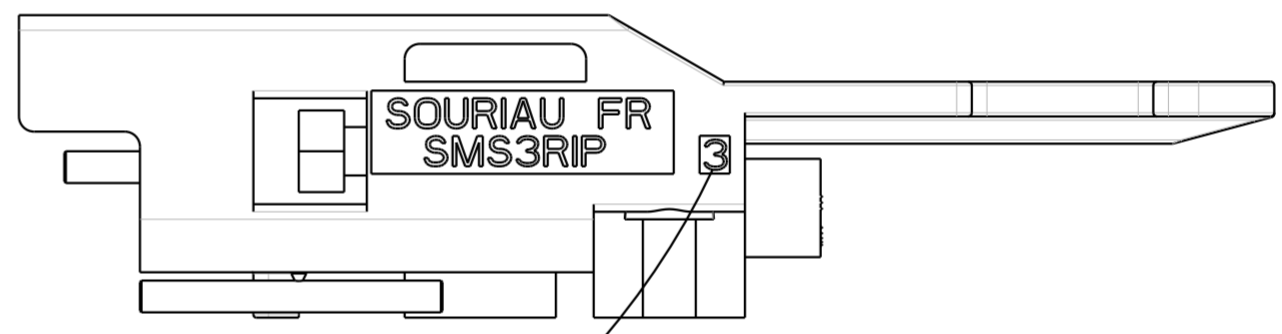

P/N : SMS3RIP**

d	21/05/14	ADD sheet 2 for cavities help and translate drawing in english		23552
ISS	DATE	Latest modification - by: BERTHOME A.		MOD N°
Designed by: <i>SORIN V.</i>		Date: 27/09/11	CUSTOMER DRAWING	
TITLE		RECTANGULAR RECEPTACLE SMS IP SMS IP 3 POINTS		
Scale	2/1	General linear Tolerances: ± --	NPRDS / PROJECT	
SOURIAU		WWW.SOURIAU.COM		This document is the property of SOURIAU It must not be reproduced or communicated without permission
FORMAT	A2	SOURIAU DRG N° REC1-0006A-C		SHEET 2 / 2

d : 0 : RL