
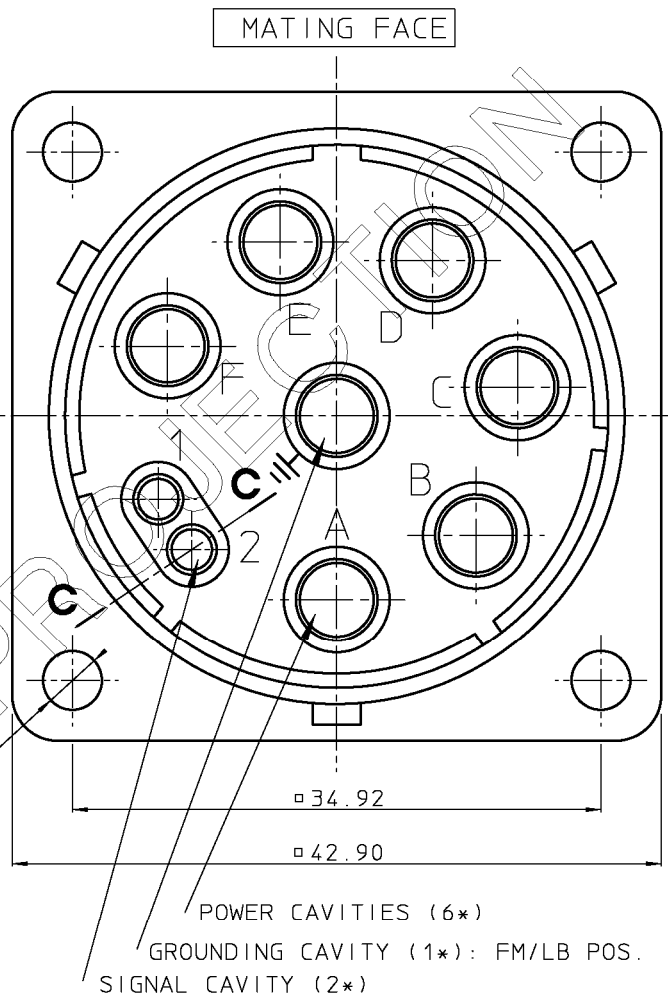


DIT IS ONZE EIGENDOM EN MAG NOCH NAGEMAAKT, HERDRUKT, OVERGEHAKT AAN DERDEN, NOCH VOOR FABRIKATIE GEBRUIKT WORDEN, ZONDER ONZE SCHRIFTELIJKE TOELATING. BIJ NIET GEBRUIK IS DE TERUGZENDING VERPLICHT.

THIS IS OUR EXCLUSIVE PROPERTY. IT IS NOT TO BE COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY, NOR USED FOR MANUFACTURING WITHOUT OUR WRITTEN CONSENT, AND HAS TO BE RETURNED TO US IN CASE OF NO USAGE

REV.	DATE	DESCRIPTION	BY	C'K'D'
01	6-2-91	BEC 9.3036: DIM 30.3 WAS 38.2	M B	
02	03-09-92	CAV. DIA. ENLARGED	Y.D.	
03	10-03-99	CONVERSION ME10	K.N.	
04	10-03-99	TEMPERATURE RANGE -55C INSTEAD OF -25C	K.N.	

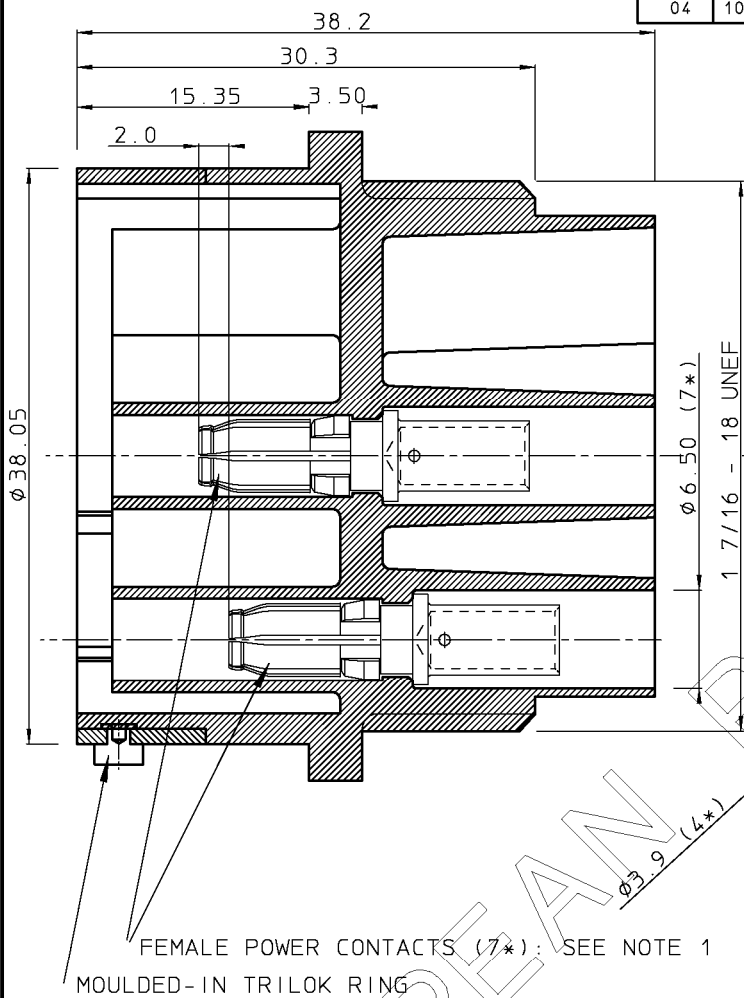

PERFORMANCE CHARACTERISTICS

- OPERATING TEMPERATURE : -55 °C TO +125 °C.
- INSULATION RESISTANCE : 5000 M Ω MIN.
- TEST POTENTIAL : 2000 V EFF.
- CONNECTOR AS PER VDE 0110 GROUPE 660V


MATERIAL

- BODY : GLASS-FILLED POLYESTER UL94-V0. COLOUR : BLACK.
- TRILOK RING: HIGH STRENGTH CUZN ALLOY, NI PLATED

NOTES

- CONTACTS TO BE ORDERED SEPARATELY
- FOR ADDITIONAL INFORMATION REFER TO TRIM-TRIO CATALOG.
- CONNECTOR TO BE MATED WITH UTG6247PN

SECTION CC

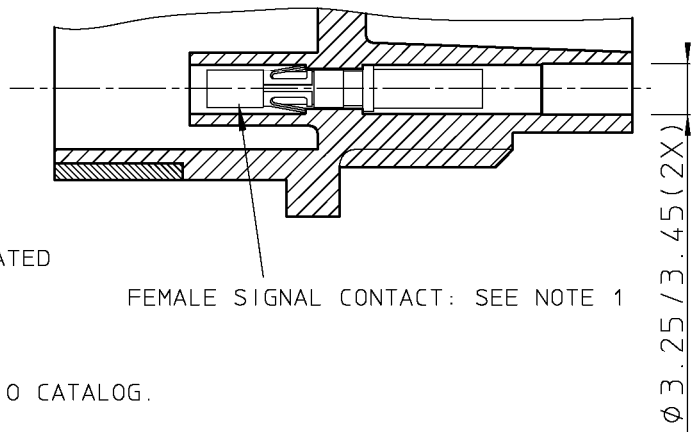

FEMALE SIGNAL CONTACT: SEE NOTE 1

04

BS,A , 201178,002

GEN. ST.	01	02	03	04	05	06	07	08	0D	50	60	70	80	90																	
INT. ST.	10	11	12	13	14	18	20	31	32	33	34	38	39	40	42	43	44	45	46	48	56	70	72	73	75	76	81	82	83	84	88

1DEC $\pm 0,2$ 1DEC
2DEC $\pm 0,1$ 2DEC
ANGLES $\pm 1^\circ$ HOEKEN

WE RESERVE THE RIGHT TO CHANGE DIMENSIONS OR REQUIREMENTS WITHOUT PRIOR NOTICE.

ALL DIMENSIONS IN MM
ALLE AFMETINGEN IN MM

APPR.	DATE	SIGN.
DRAFT	26-9-90	M BUEDS
CHECKED		
PROD. MGR.		
PR.ENG. MGR.		
PR. MGT. MGR.		

REFERENCES / REFERENTIES

FEMALE RECEPTACLE

CAT. No. UTG0247S

SOURIAU
Connection Technology

SOURIAU
Route Nationale 23
72470 CHAMPAGNE

SCALE

BS,A , 201178,002 04

DRAWING NR. CUSTOMER DRAWING REVISTON

NOT EXPORT CONTROLLED