

UTG Series



Specifications

Shell size	Contacts number*	Connector type / Part number	
		Free hanging receptacle	
		Male insert	Female insert
10	4 #16	UTG1104P	UTG1104S
	2 + ground #16	UTG1103P	UTG1103S
	3 #20 + 3 #16	-	UTG1103W3S
12	8 #16	UTG1128P	UTG1128S
14	12 #16	UTG11412P	UTG11412S
16	19 #16	UTG11619P	UTG11619S
18	23 #16	UTG11823P	UTG11823S
20	28 #16	UTG12028P	UTG12028S
	20 #16	UTG12020P	UTG12020S
22	35 #16	UTG12235P	UTG12235S
24	48 #16	UTG12448P	UTG12448S
	7 #8 + 2 #16	UTG1247P	UTG1247S


*Contacts supply separately

For IP65 waterprotected version (for only receptacle) add «H» behind N or S. Ex. UTG1103PH

UTG Series

Dimensions

Free hanging - UTG1

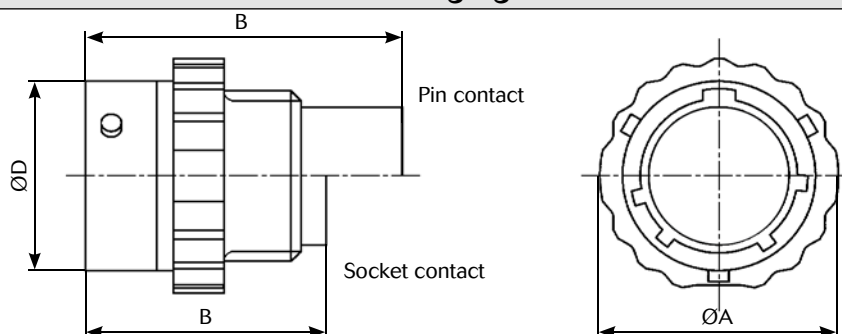

Shell size	ØA ^{±0.2}	B max		ØD ^{±0.15}	
		Pin contact	Socket contact		
10	19.5	31.7	24.3 / 27.6	15.0	
12	23.5		24.3		19.0
14	27				22.2
16	30.0				25.3
18	33.3	31.7 / 34.0	24.3 / 30.4	28.5	
20	36.5	33.3 / 34.3	25.9	31.7	
22	39.5			34.9	
24	42.1			38.0	