
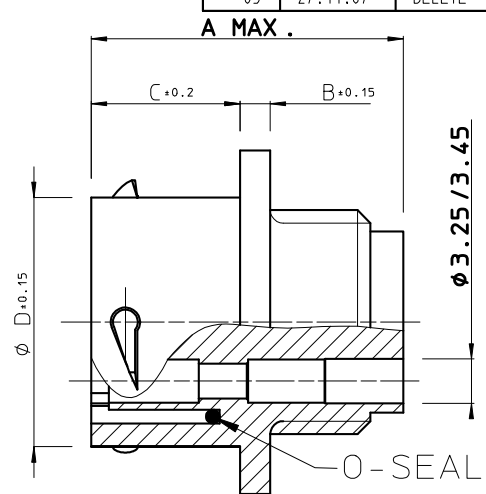


DIT IS ONZE EIGENDOM EN MAG NOCH NAGEMAAKT, HERDRUKT, OVERGEMAAKT AAN DERDEN, NOCH VOOR FABRIKATIE GEBRUIKT WORDEN, ZONDER ONZE SCHRIFTELIJKE TOELATING. BIJ NIET GEBRUIK IS DE TERUGZENDING VERPLICHT.


THIS IS OUR EXCLUSIVE PROPERTY. IT IS NOT TO BE COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY, NOR USED FOR MANUFACTURING WITHOUT OUR WRITTEN CONSENT, AND HAS TO BE RETURNED TO US IN CASE OF NO USAGE

BS, A , 201766 , 008 , 03

WIRING FACE

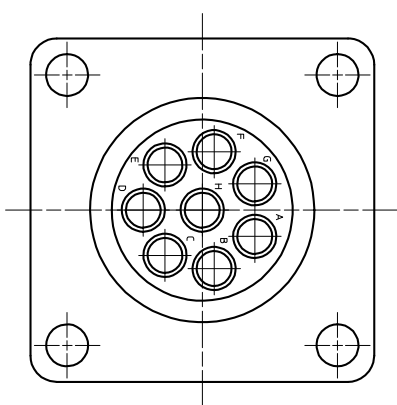

MATING FACE

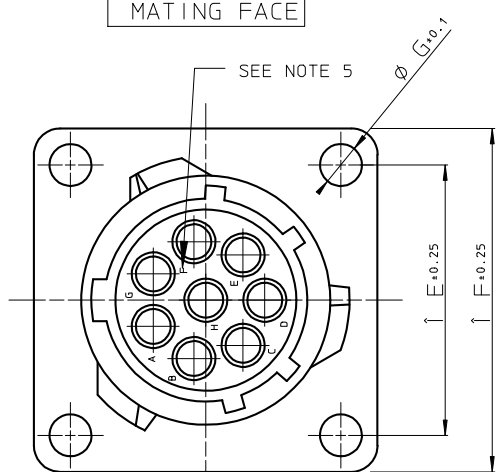

CAT. NUMBER	A MAX.	B+0.15	C+0.2	Ø D+0.15	E+0.25	F+0.25	Ø G+0.1	Ø H+0.1	Ø J+0.1
UTP0103SH	27.6	2.3	11.3	15.0	18.3	23.8	3.2	17.3	15.1
UTP0104SH	24.3	2.3	11.3	15.0	18.3	23.8	3.2	17.3	15.1
UTP0125SH	24.3	2.3	11.3	19.0	20.6	26.2	3.2	21.8	18.2
UTP0128SH	24.3	2.3	11.3	19.0	20.6	26.2	3.2	21.8	18.2
UTP01412SH	24.3	2.3	11.3	22.2	23.0	28.6	3.2	25.0	21.4
UTP01619SH	24.3	2.3	11.3	25.3	24.6	31.0	3.2	28.1	24.6
UTP0187SH	30.4	2.5	17.9	28.5	26.9	33.3	3.2	31.3	27.8
UTP01823SH	24.3	2.5	11.3	28.5	26.9	33.3	3.2	31.3	27.8
UTP02028SH	27.0	2.5	14.5	31.7	29.4	36.5	3.2	34.5	30.9
UTP02235SH	28.0	3.5	14.5	34.9	31.6	39.7	3.2	37.7	34.1
UTP02448SH	30.4	3.5	15.3	38.0	34.9	42.9	3.9	40.9	37.3

UTP0128SH AS SHOWN

MATERIAL


- BODY : GLASS-FILLED POLYESTER UL94-V0. COLOUR : BLACK
- O-SEAL : NBR

PERFORMANCE CHARACTERISTICS

- OPERATING TEMPERATURE : -25 °C TO +125 °C.
- INSULATION RESISTANCE : 5000 MOhm MIN.
- TEST POTENTIAL : 2000 V EFF.
- DEGREE OF PROTECTION PER DIN 40050 : IP65

NOTES

- 1.CONNECTOR ACCEPTS Nr 16 STRIP FORMED SOCKET, MACHINED SOCKET AND SUBMINIATURE COAXIAL PIN AND SOCKET CONTACTS.
- 2.CONTACTS TO BE ORDERED SEPARATELY : REFER TO TRIM - TRIO CATALOG.
- 3.FOR OTHER INSERT ARRANGEMENTS SEE BS,C ,201458,000
- 4.MATING PART : UTP6----P
- 5.THE CAVITY MARKING OF ALL SIZES IS WITH LETTERS, EXCEPT FOR THE ITEMS UTP0103SH AND UTP0187SH, THEY HAVE A NUMBERING.

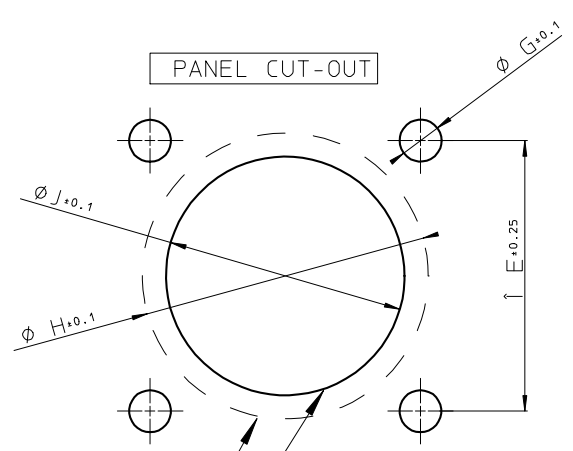

REAR PANEL MOUNTING
FRONT PANEL MOUNTING

GEN. ST.	01	02	03	04	05	06	07	08	0D	50	60	70	80	90																	
INT. ST.	10	11	12	13	14	18	20	31	32	33	34	38	39	40	42	43	44	45	46	48	56	70	72	73	75	76	81	82	83	84	88
1DEC ±0,2 1DEC 2DEC ±0,1 2DEC ANGLES ±1° HOEKEN		APPR.		DATE		SIGN.		FEMALE RECEPTACLE WATERPROTECTED																							
		DRAFT		21-12-95		S.Van Dessel		CAT. No. UTP0----SH																							
		CHECKED																													
WE RESERVE THE RIGHT TO CHANGE DIMENSIONS OR REQUIREMENTS WITHOUT PRIOR NOTICE.		PROD. MGR.						SOURIAU Route Nationale 23 72470 CHAMPAGNE SCALE 1:7:1																							
		PR.ENG.MGR.																													
ALL DIMENSIONS IN MM		PR.MGT.MGR.																													
ALLE AFMETINGEN IN MM								REFERENCES/REFERENTIES																							
								BS, A , 201766 , 008 , 03 DRAWING NR. CUSTOMER DRAWING																							
								NOT EXPORT CONTROLLED																							