
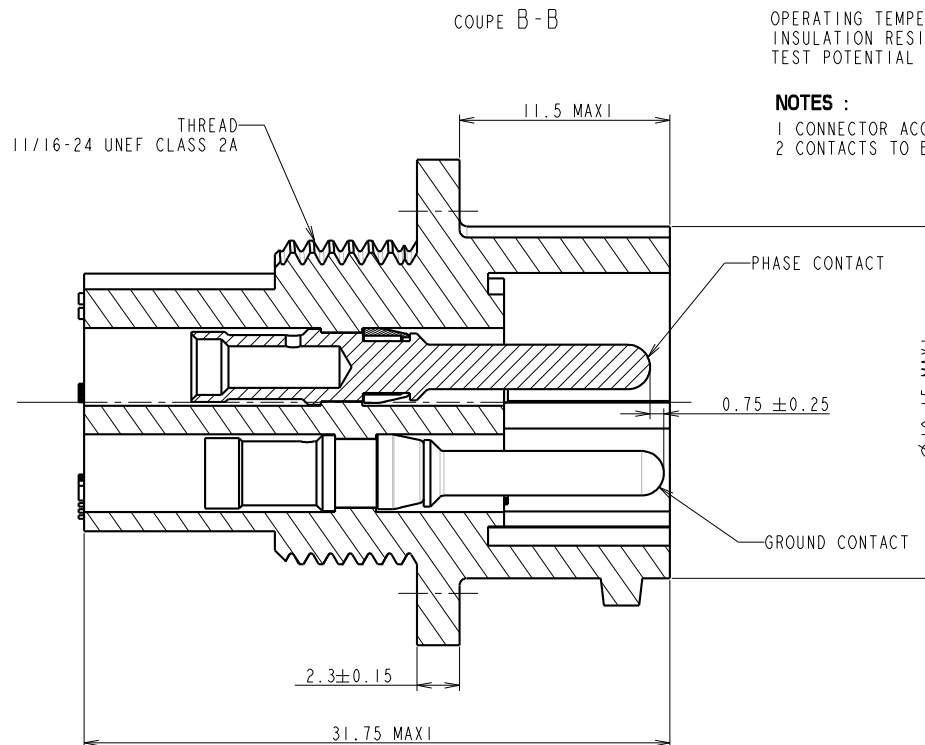


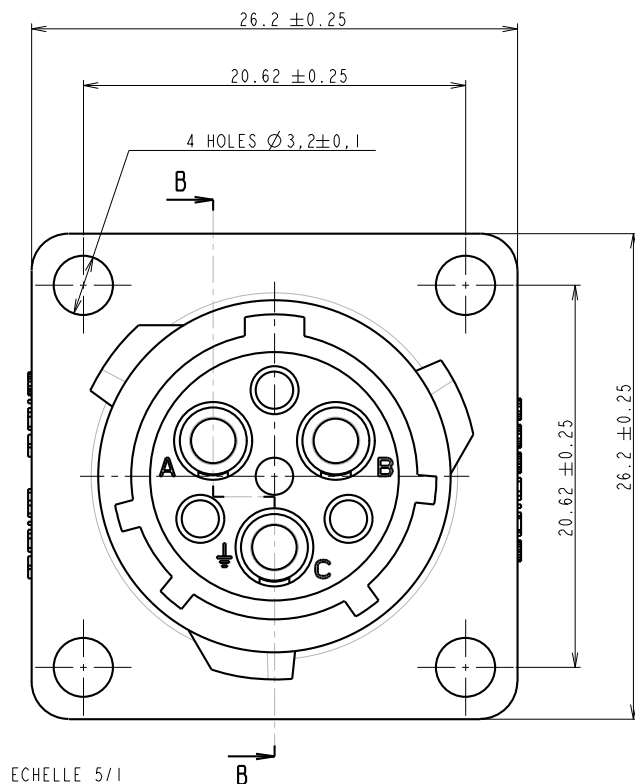

MATERIAL :
BODY : GLASS FILLED POLYESTER COLOUR BLACK



PERFORMANCE CHARACTERISTICS:

OPERATING TEMPERATURE : -55°C TO 125°C
INSULATION RESISTANCE : $5000 \text{ M}\Omega \text{ MIN}$
TEST POTENTIAL : 2000 V EFF

NOTES :

- 1 CONNECTOR ACCEPTS #12 MACHINED PIN CONTACT
- 2 CONTACTS TO BE ORDERED SEPARATELY

PANEL CUT OUT

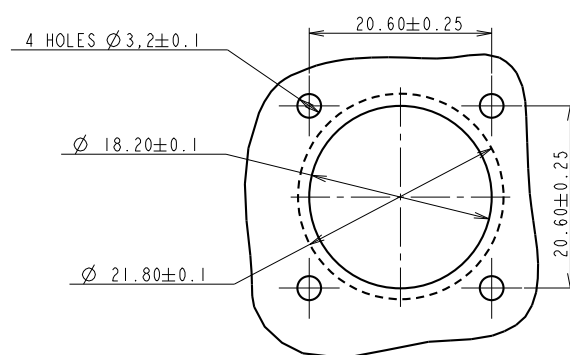

PART NUMBER = UTP0122GIP
CUSTOMER DRAWING

h	26/08/10	Update drawing	N° 21347
ISS	DATE	Latest modification - by:	ROUILLARD Ch
Designed by:	RAGINE M.	Date: 03/07/08	Type of drawing: CUSTOMER
Checked by:	SEE DISTRIBUTION LIST	Date:	SEE DISTRIBUTION LIST
TITLE	MALE RECEPTACLE SIZE 12 LAYOUT 3 PTS UTP CONNECTOR		
Scale	General angular Tolerances: $\pm 1^{\circ}$	MATERIAL --	
2/1	General linear Tolerances ± 0.1	General machining surface texture Ra 3.2	Geometrical Tolerances See NF E 04-552
PROJECT IC081903A		This document is the property of SOURIAU It must not be reproduced or communicated without permission SHEET	
FORMAT	A2	UTP0122GIP-C	1/1