

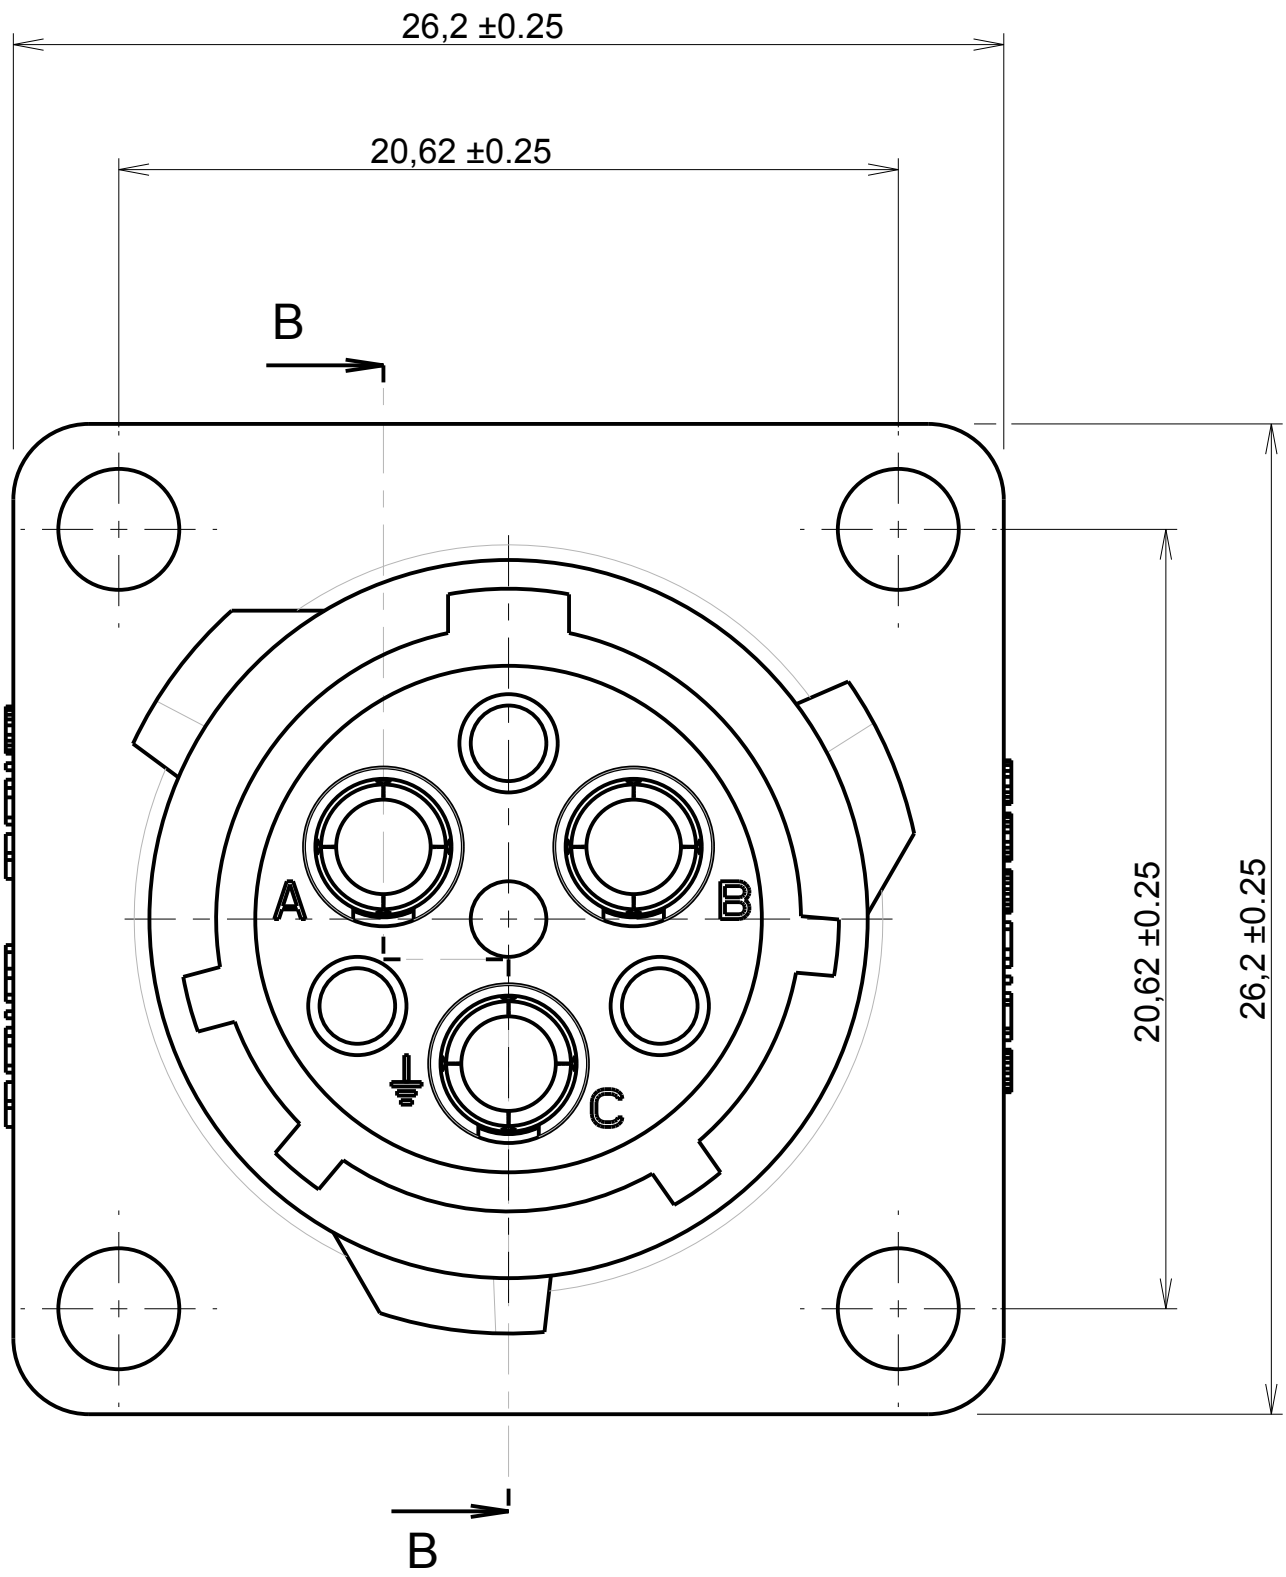
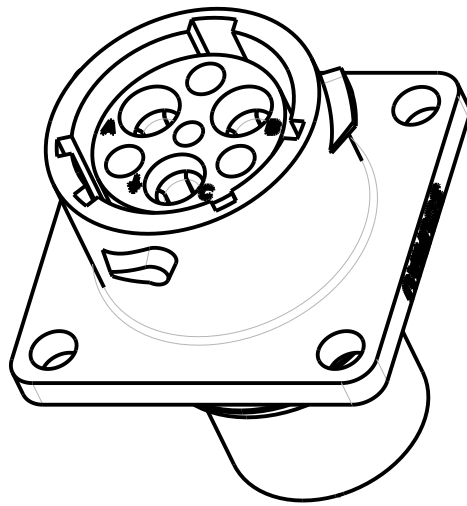


i : 1 : RL

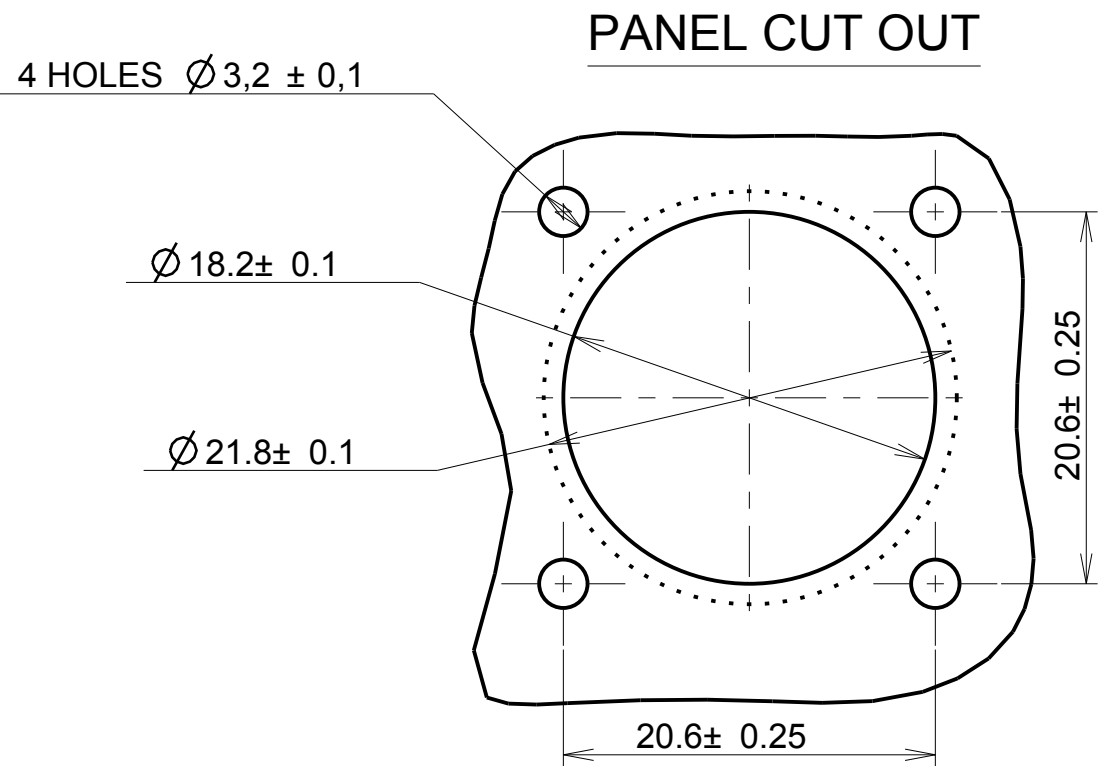

11/16-24 UNEF CLASS 2A
THREAD

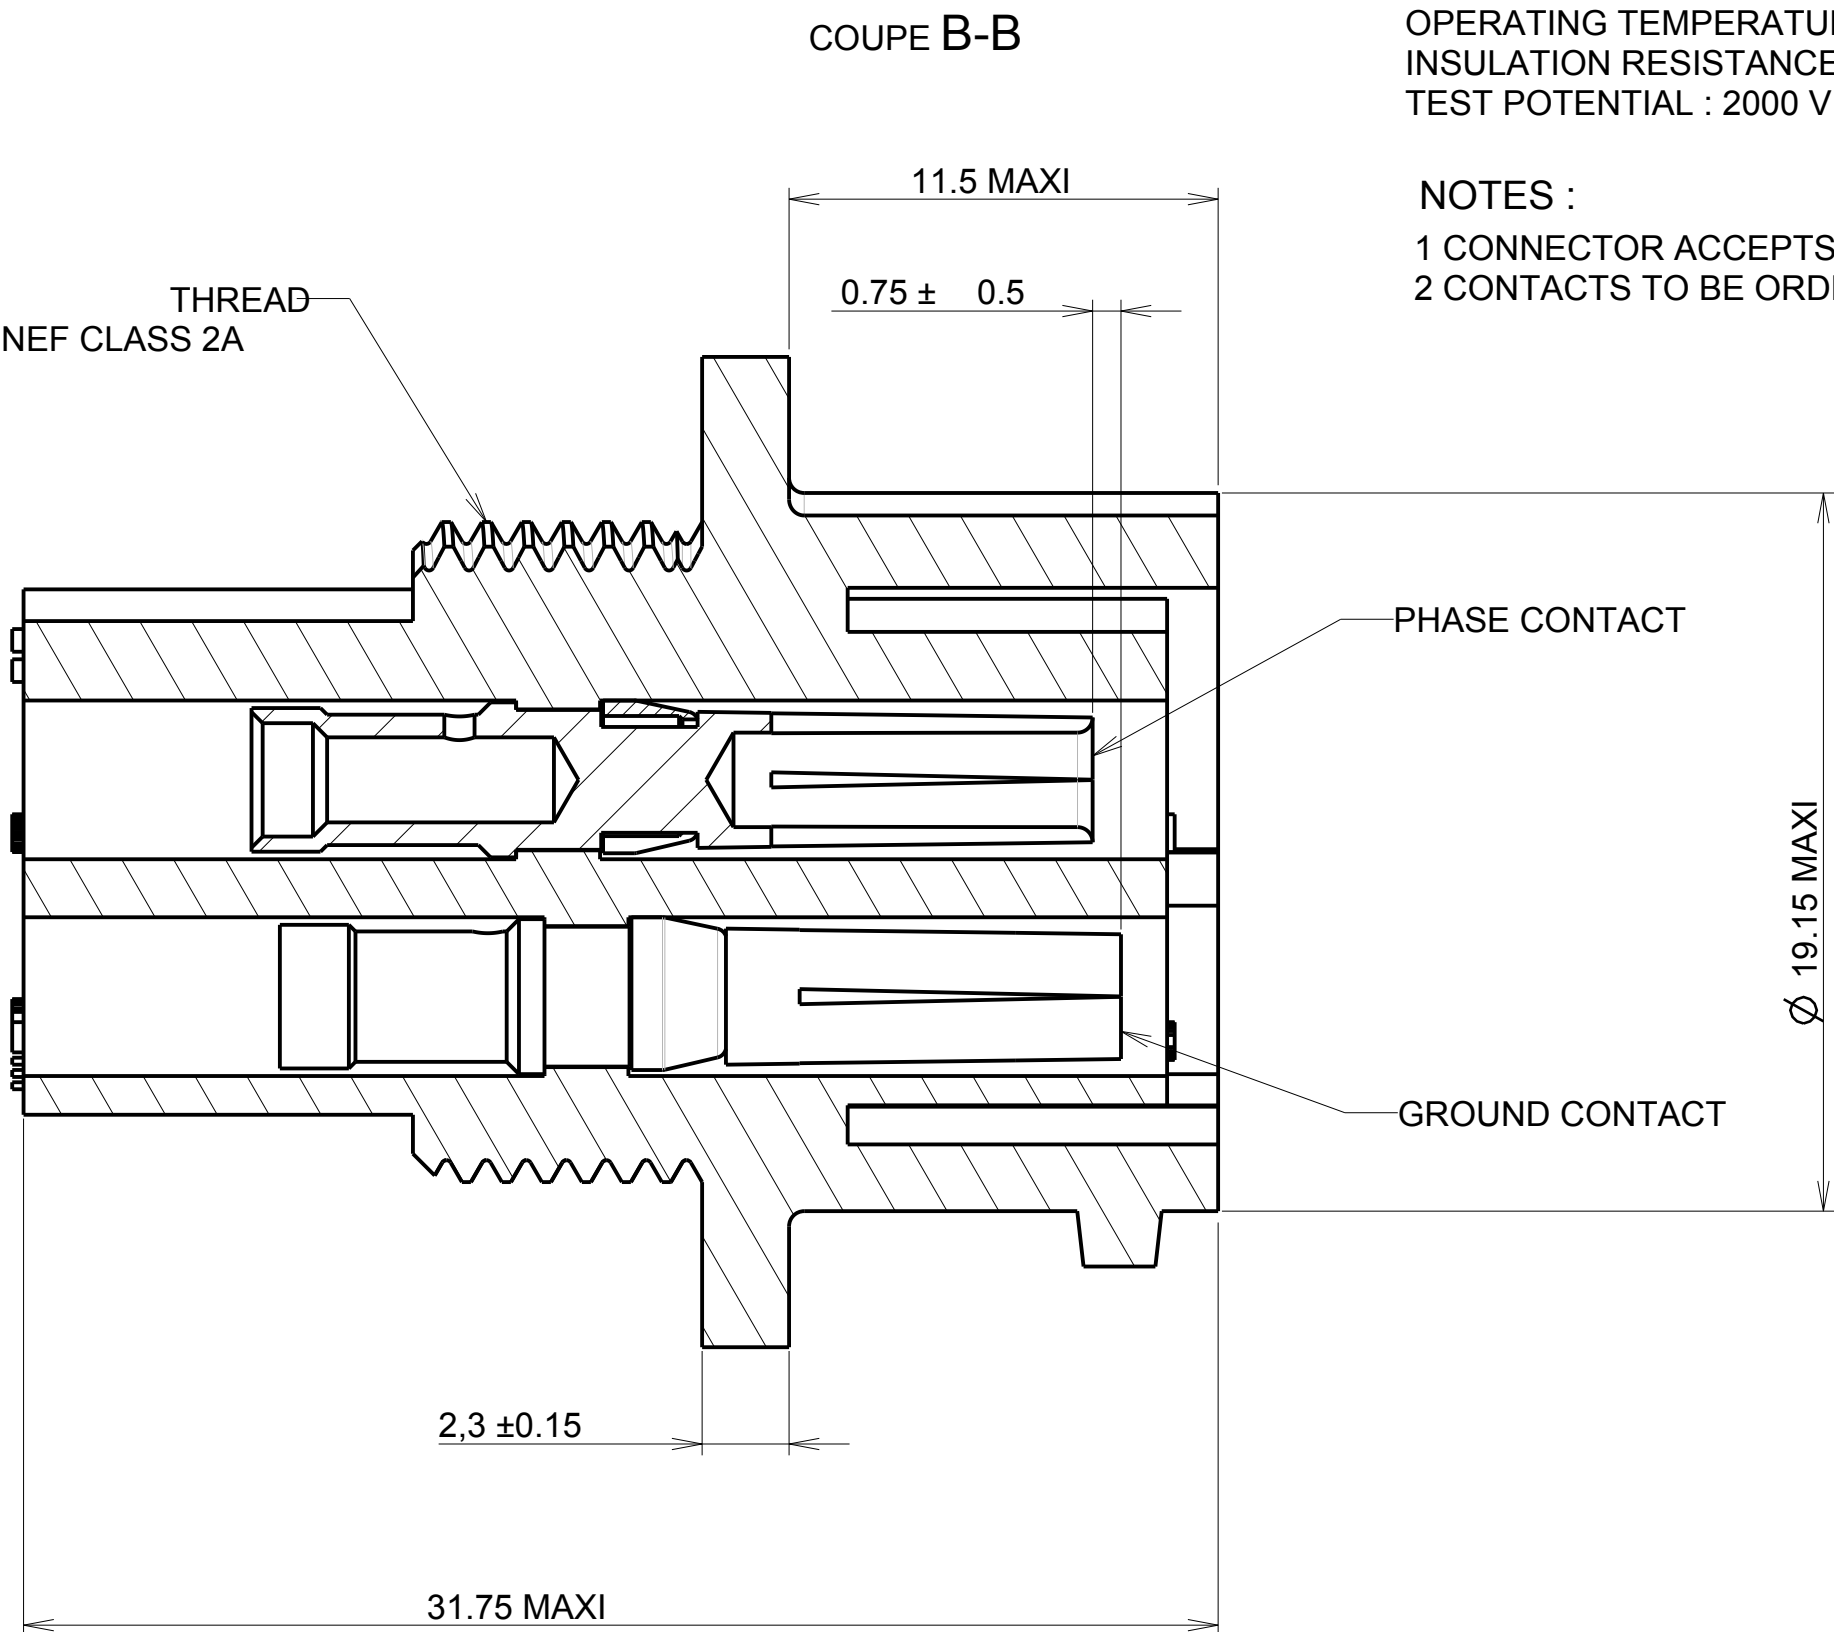

MATERIAL :
BODY : GLASS FILLED POLYESTER COLOUR BLACK

PERFORMANCE CHARACTERISTICS:
OPERATING TEMPERATURE : -55°C TO 125°C
INSULATION RESISTANCE : 5000 M Ω MIN
TEST POTENTIAL : 2000 V EFF

NOTES :
1 CONNECTOR ACCEPTS #12 MACHINED SOCKET CONTACT
2 CONTACTS TO BE ORDERED SEPARATELY

P/N : UTP0122G1S

i		11/07/13	Update drawing , modification dimension 0.75 ± 0.25 --> 0.75 ± 0.5 and change part number customer drawing UTP0122G1S-C ----> UTP0122G1S-C01		22843A
ISS	DATE		Latest modification - by: J.FEURPRIER		MOD N°
Designed by: M.RAGaine			Date:03/07/08	CUSTOMER DRAWING	
TITLE		FEMALE RECEPTACLE SIZE 12 LAYOUT 3 PTS UTP CONNECTOR			
Scale			General linear Tolerances: ± 0.1	NPRDS / PROJECT IC081913A	
SOURIAU		WWW.SOURIAU.COM			This document is the property of SOURIAU It must not be reproduced or communicated without permission
FORMAT	SOURIAU DRG N° UTP0122G1S-C01				SHEET 1/1
A2		NOT EXPORT CONTROLLED			

NOT EXPORT CONTROLLED