

H G F E D C B A



b ; 4 ; RL

4

3

2

1

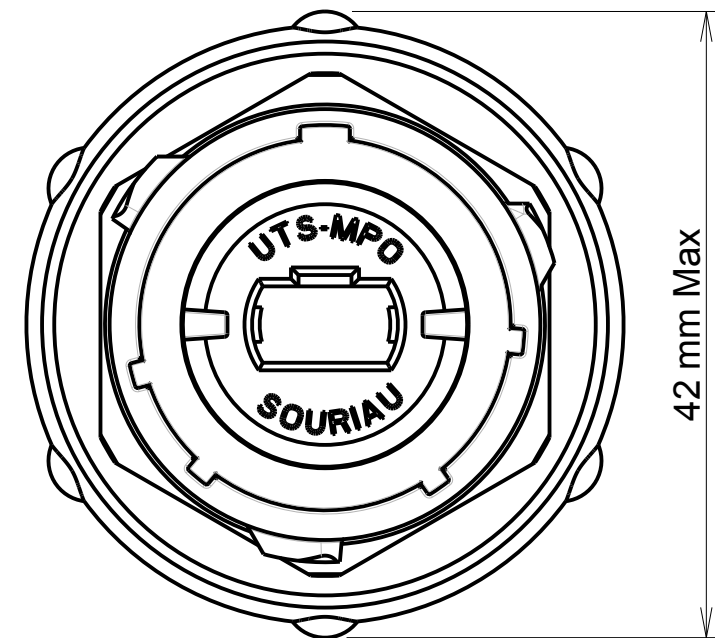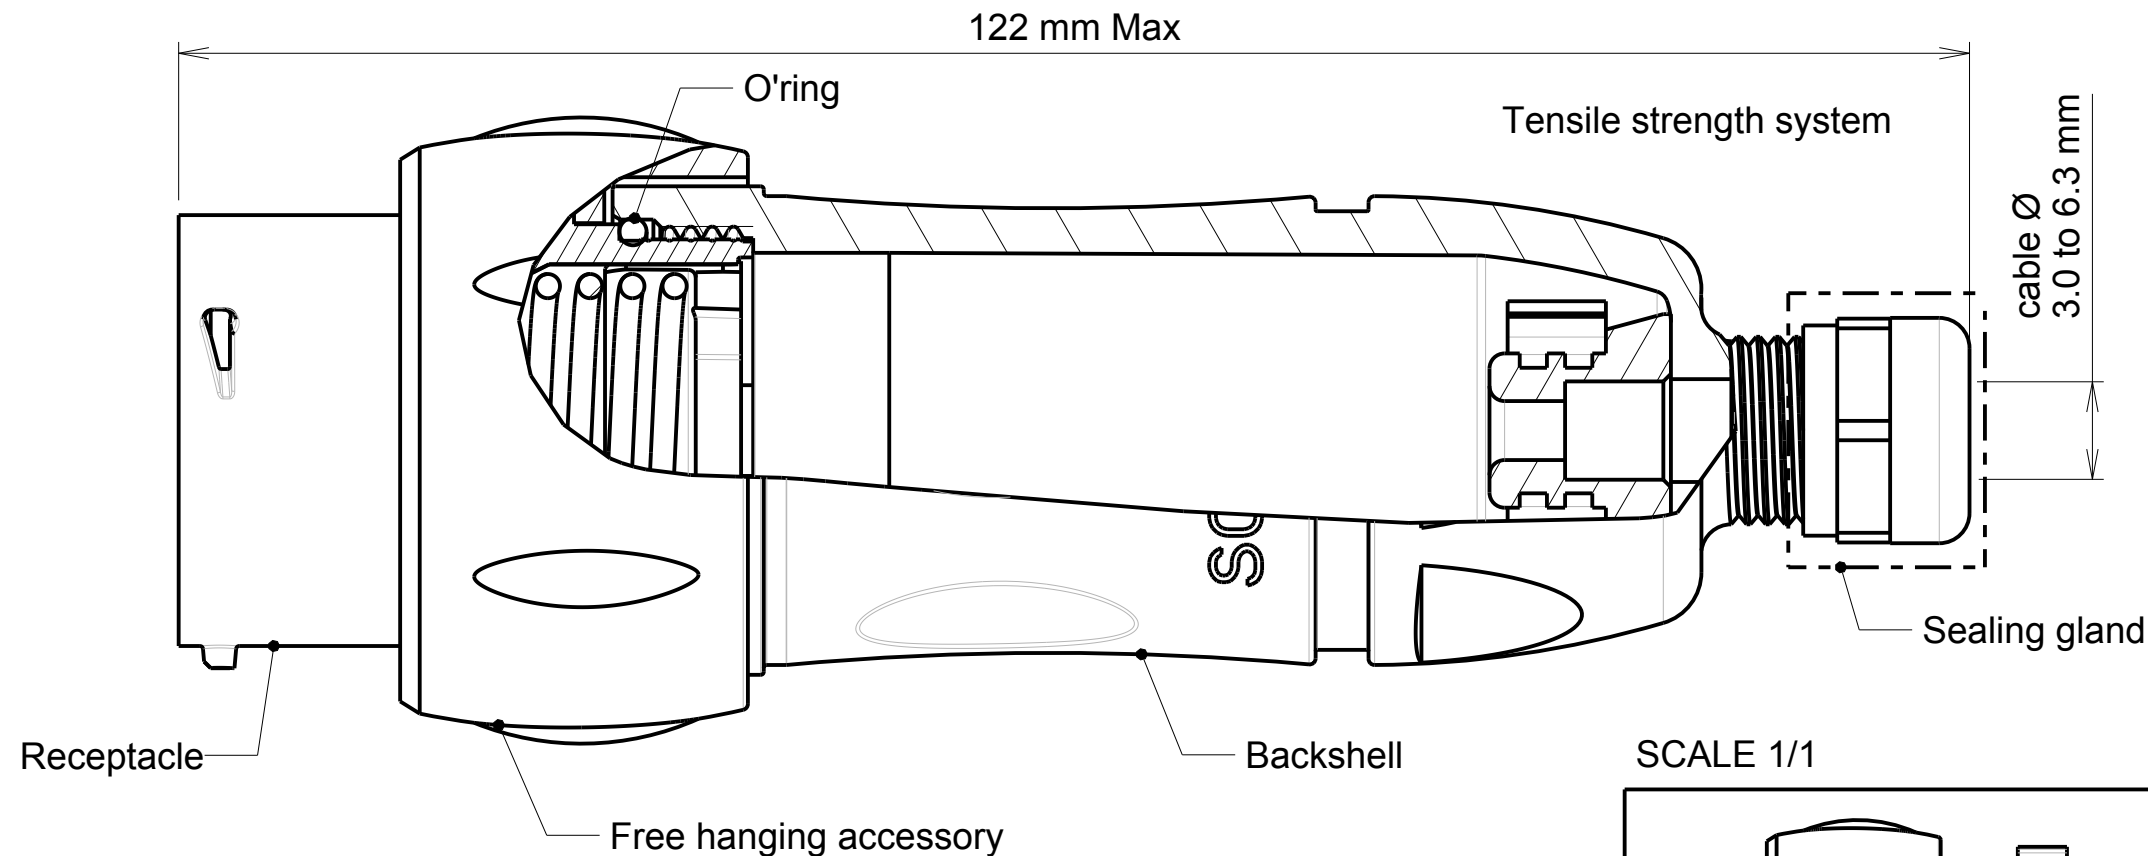

4

3

2

1

MATERIAL :


- Receptacle : Plastic
- Backshell : Plastic
- O'ring : Silicone
- Free hanging accessory : Plastic
- Sealing gland : Plastic

PACKAGING (in a plastic bag):


- 1 mounted receptacle
- 1 backshell with sealing gland
- 1 tensile strength kit

TENSILE STRENGTH SYSTEM :

- See the drawing : UTS19004A-C01

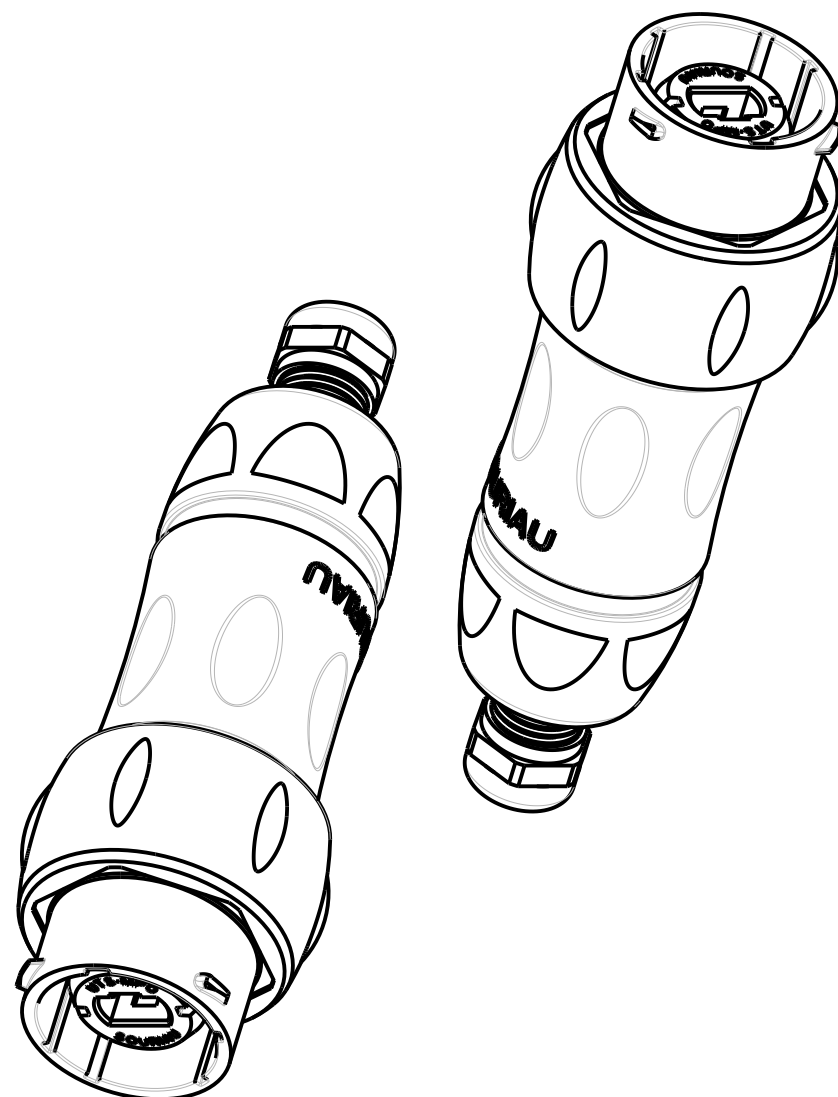

SCALE 1/1

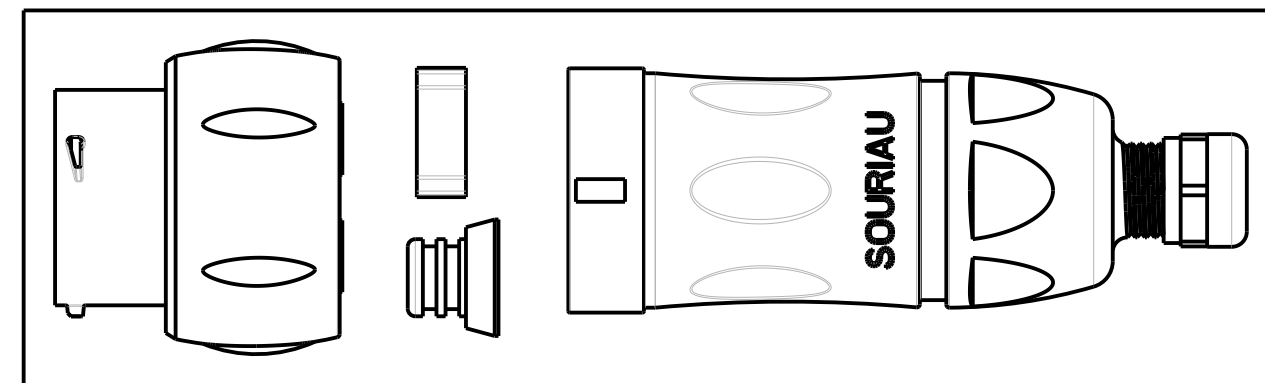

P/N		UTS1JC18MPN			
b	06/03/14	- Reworking of the UTS LC MPO (standard version) folder : Distribution 23434 - Update of the drawing : new tensile strength ring Accepted range of cable : Ø3.0 to 6.3 mm / Modification of the insert			23434
ISS	DATE	Latest modification - by: M.SORLIN			MOD N°
Designed by: B.MONCELET		Date:08/01/13	Type of drawing: CUSTOMER		
Checked by: SEE DISTRIBUTION LIST		Date: SEE DISTRIBUTION LIST			
TITLE		Free hanging receptacle size 18 with integrated MPO feedthrough adaptor and backshell / Unitbox			
Scale 2/1	General angular Tolerances: ± 1°		MATERIAL -- --		
	General linear Tolerances : ±0.1		General machining surface texture	Ra 3.2 	Geometrical Tolerances See NF EN ISO 1101
		SOURIAU Route Nationale 23 72470 CHAMPAGNE Tel. (33)02.43.54.35.00			PROJECT IC123611
		This document is the property of SOURIAU It must not be reproduced or communicated without permission			
FORMAT A3		DRAWING REFERENCE UTS1JC18MPN-C01			SHEET 1 / 1
NOT EXPORT CONTROLLED					

H G F E D C B A