

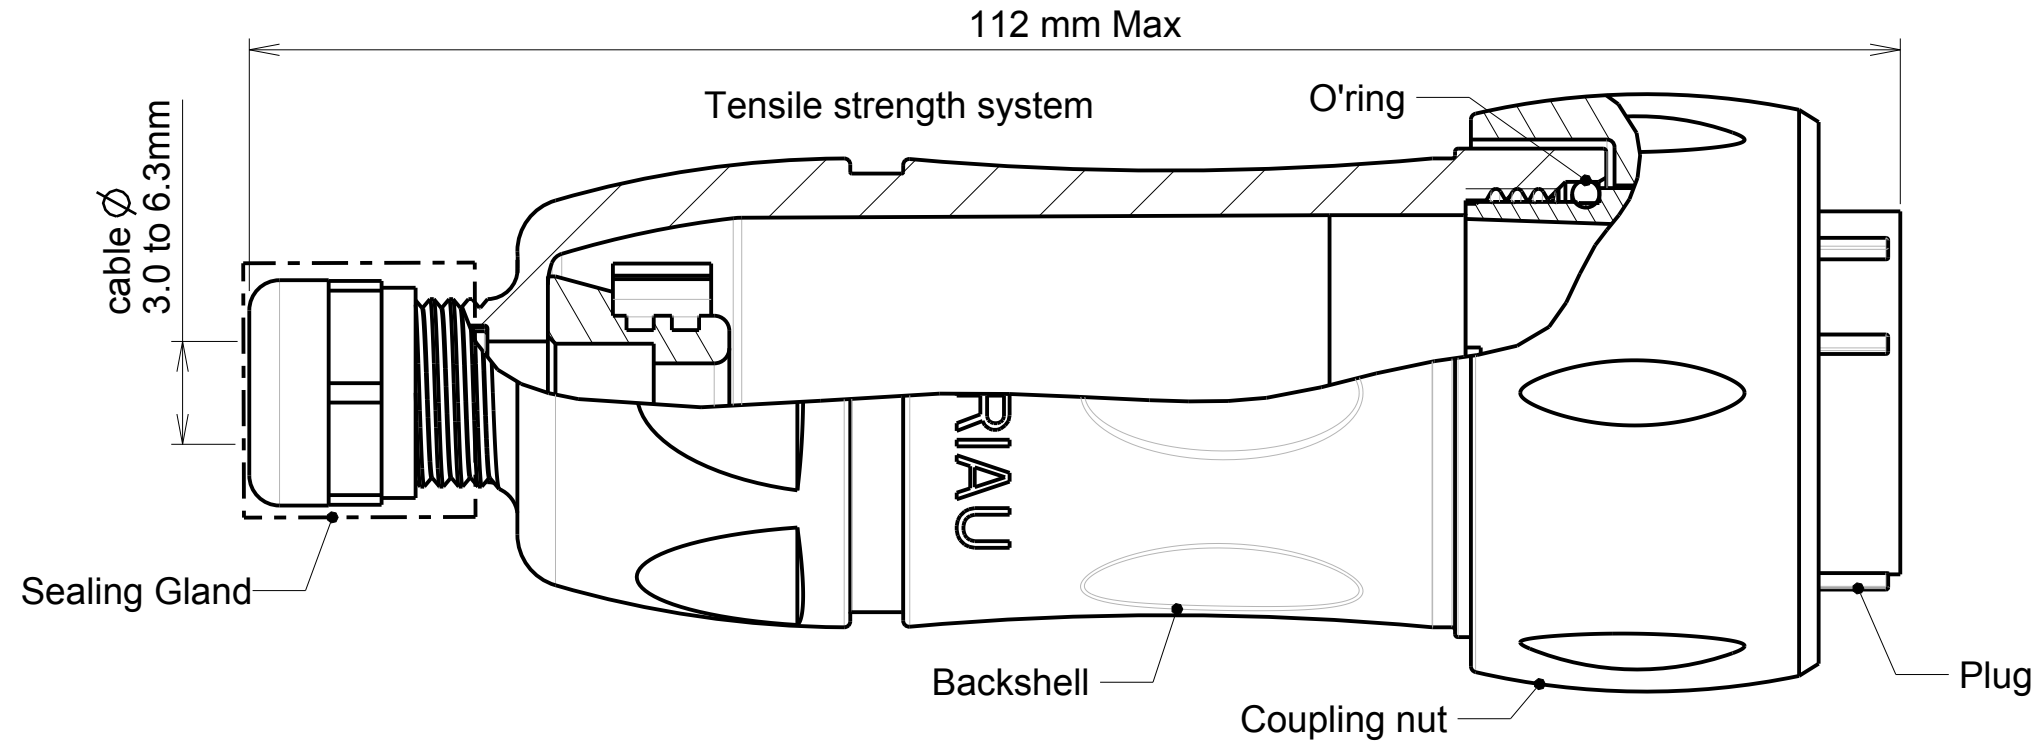
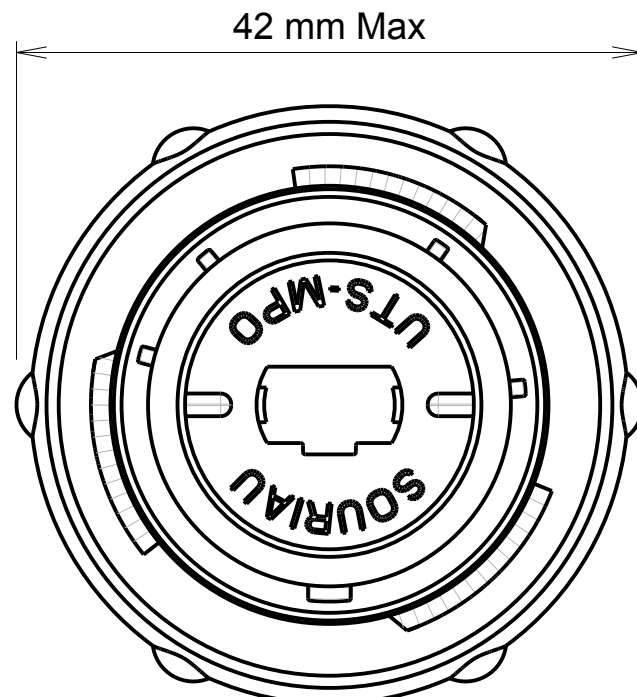


b ; 2 ; RL

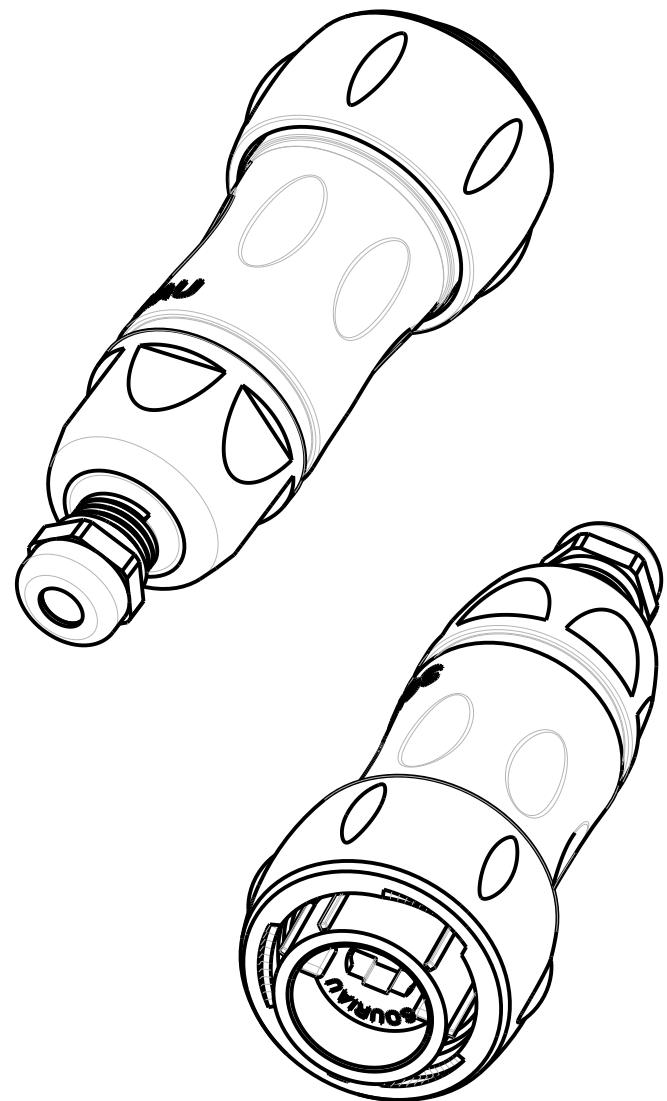

SCALE 1/1

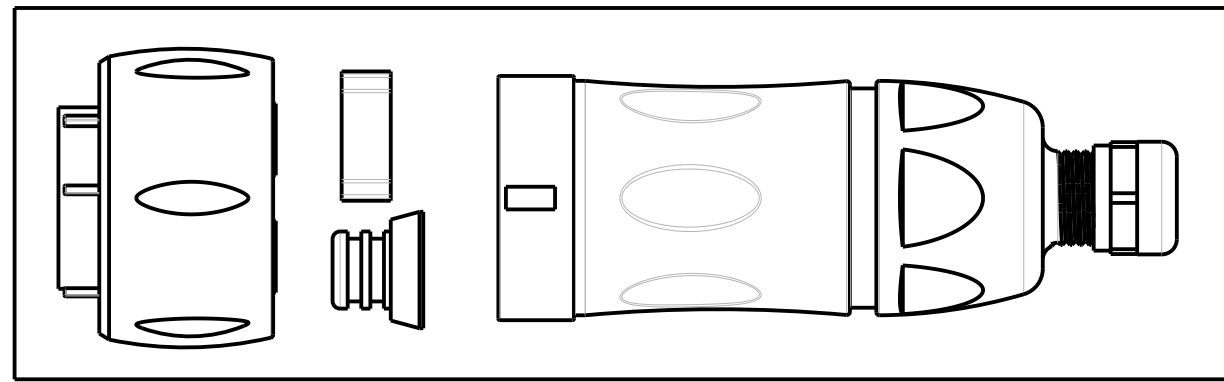

MATERIAL :
Plug : Plastic
Backshell : Plastic
O'ring : Silicone
Coupling nut : Plastic
Sealing gland : Plastic

PACKAGING (in a plastic bag) :
- 1 mounted plug
- 1 backshell with sealing gland
- 1 tensile strength kit

TENSILE STRENGTH SYSTEM :
- See the drawing : UTS19004A-C01

P/N		UTS6JC18MPN		
b	06/03/14	- Reworking of the UTS LC MPO (standard version) folder : Distribution 23434 - Update of the drawing : new tensile strength ring Accepted range of cable Ø3.0 to 6.3 mm		23434
ISS	DATE	Latest modification - by: M.SORLIN		MOD N°
Designed by: B.MONCELET		Date: 13/11/12	Type of drawing:	CUSTOMER
Checked by: SEE DISTRIBUTION LIST		Date: SEE DISTRIBUTION LIST		
TITLE		Cable plug size 18 with insert and backshell to accept 1 MPO contact / Unitbox		
Scale 2/1	General angular Tolerances: ± 1°	MATERIAL -- --		
	General linear Tolerances : ±0.1	General machining surface texture 	Geometrical Tolerances See NF EN ISO 1101	PROJECT IC123611
		SOURIAU Route Nationale 23 72470 CHAMPAGNE Tel. (33)02.43.54.35.00		This document is the property of SOURIAU It must not be reproduced or communicated without permission
FORMAT A3	DRAWING REFERENCE UTS6JC18MPN-C01			SHEET 1 / 1
NOT EXPORT CONTROLLED				

NOT EXPORT CONTROLLED