

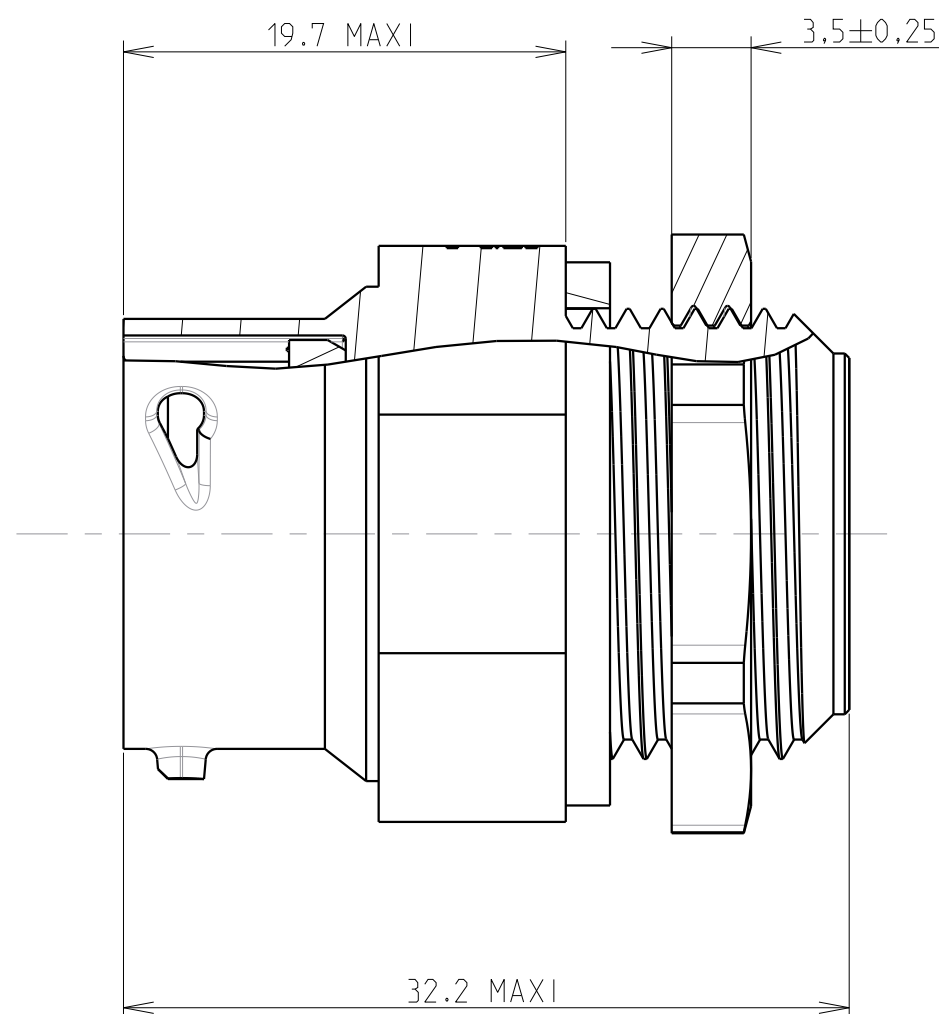


Mass (g)
18.50

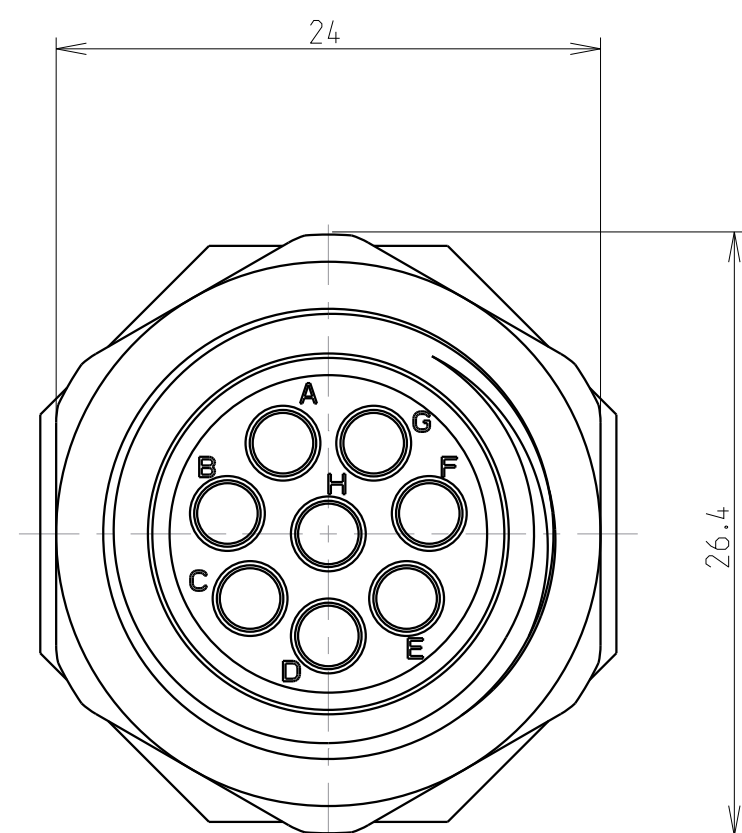

COUPE A-A

FRONT VIEW

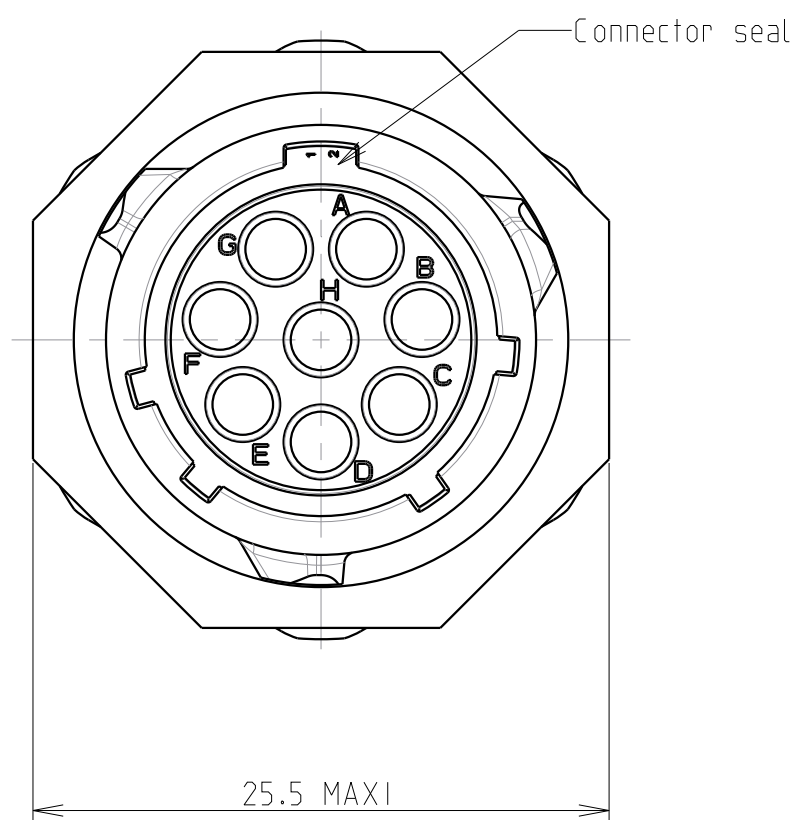

MATERIALS:

RECEPTACLE: UL94V0 Polyamide. Color BLACK
PANEL SEAL WASHER: Nitrile rubber
Hex. NUT: Nickel Plated Brass
CONNECTOR SEAL: Silicone

PRODUCT PERFORMANCE:


Operating temperature: -40 °C to 105 °C
Corrosion salt spray: 500 HOURS
Durability: 250 MATE-UNMATE CYCLES.
Test potential: 2000 Vrms during 1 min.

SEALING: When mated to cable plug:
- IEC 60529-IP68: 10m WATER. 1 Week
- IP69K: High-pressure water. DIN 40050.

NOTA


- 1: MAXIMUM PANEL THICKNESS 3.5mm.
Max nut tightened torque: 3.75 Nm.
- 2: Contact to be ordered separately: refer to UTS Catalog.
- 3: PACKAGING: Parts are delivered already mounted in one plastic bag.


P/N : UTS7128PM20NUT

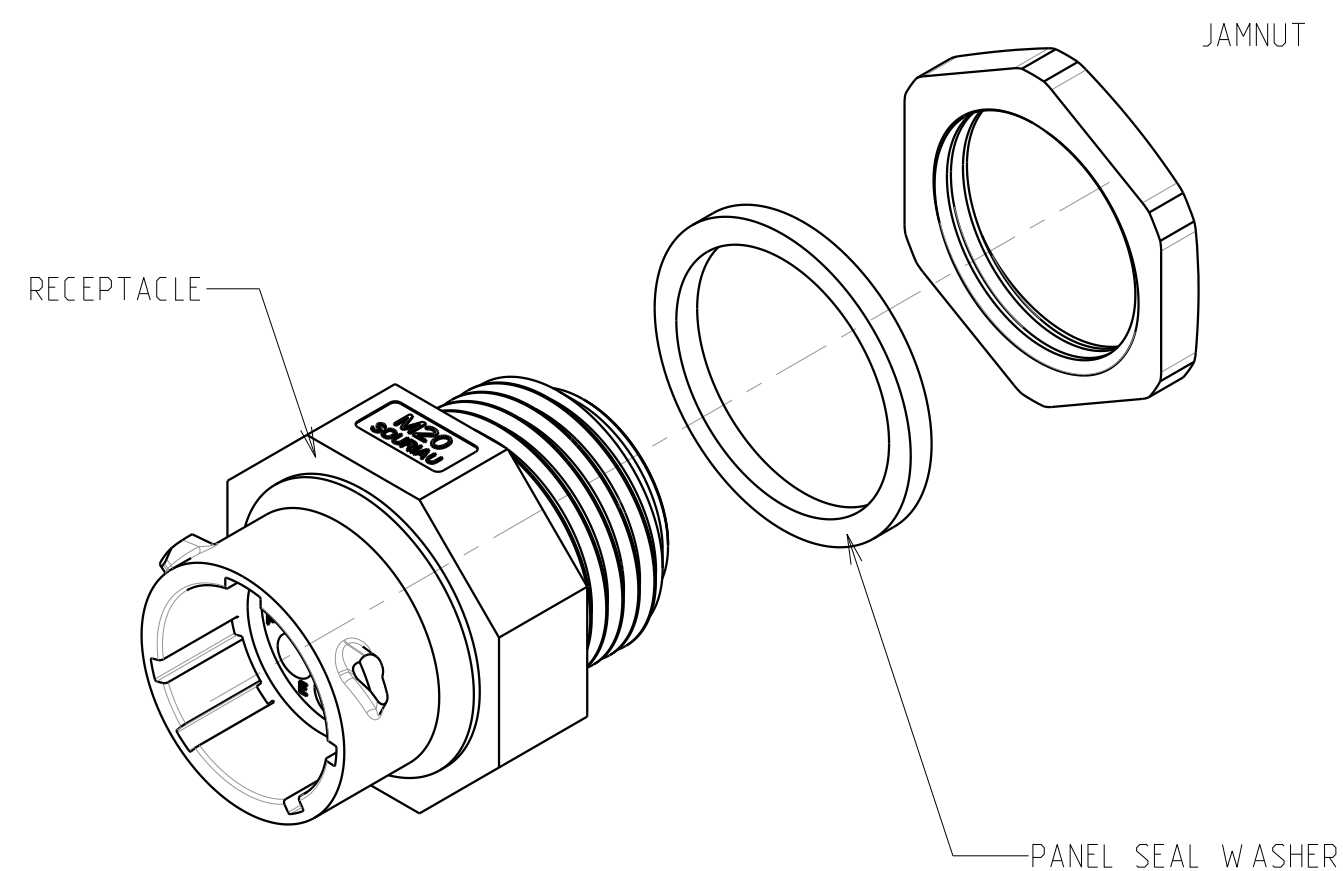

SCALE 2/1

PANEL MOUNTING (1)

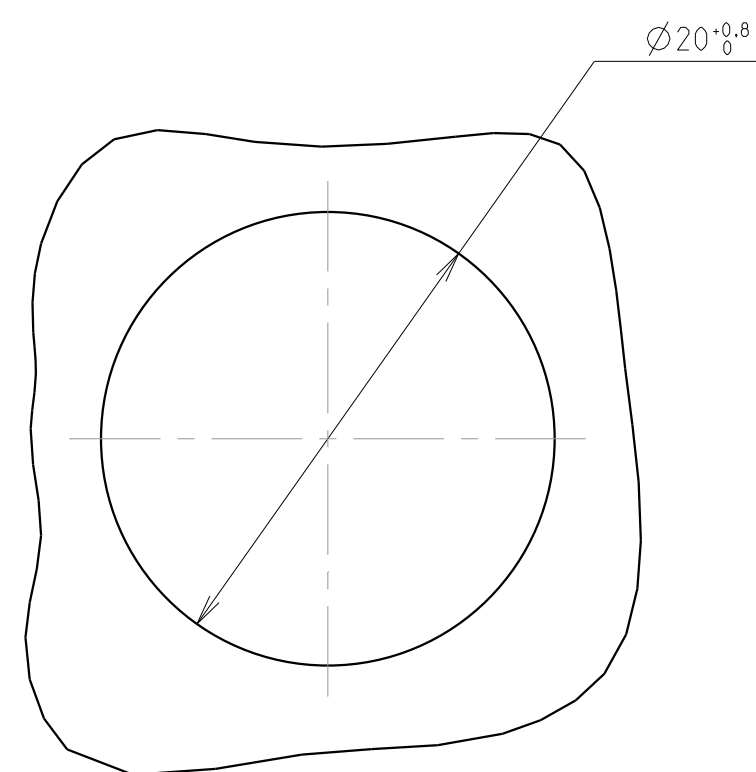

A	07/01/15	NEW DRAWING (update drawing york S100049)		23823A
ISS	DATE	Latest modification - by:		MOD N°
Designed by:		P.LANDAIS Date:07/01/15	CUSTOMER DRAWING	
TITLE		UTS RECEPTACLE SIZE 12 - REF : UTS7128PM20NUT UTS CONNECTOR		
Scale 3/1		General linear Tolerances: ± 0.2	NPRDS / PROJECT DDM1412008	
SOURIAU		WWW.SOURIAU.COM		This document is the property of SOURIAU It must not be reproduced or communicated without permission
FORMAT A2	SOURIAU DRG N° C274-UTS1-A			SHEET 1 / 1