


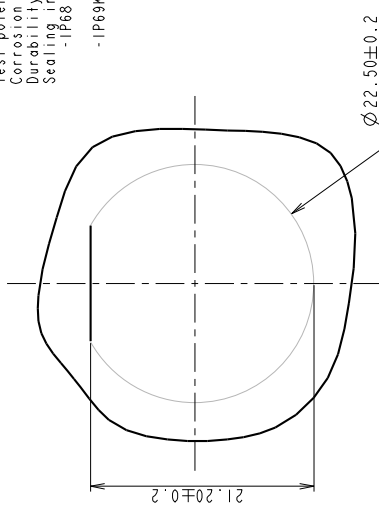


MATING FACE

PANEL CUT OUT


MATERIAL :
 Shell: Polyamid UL94 V-0
 Insert: Polyamid UL94 V-0
 Seal gasket : Sealing IP68/69K : Silicone
 O'ring: nitril
 Nut: Aluminium alloy black anodized

PERFORMANCE CHARACTERISTICS :
 Operating temperature: -40°C up to 105°C
 Insulation resistance: 5000 MΩmin
 Test potential: 2000 Vrms for #16 layout
 Corrosion salt spray: 500 hours
 Durability: 250 matings and unmatings
 Sealing in mated conditions:
 - IP68 : immersion under 10 m of water.
 - IP69K : exposure to high pressure water of cleaning equipment (DIN 40050)

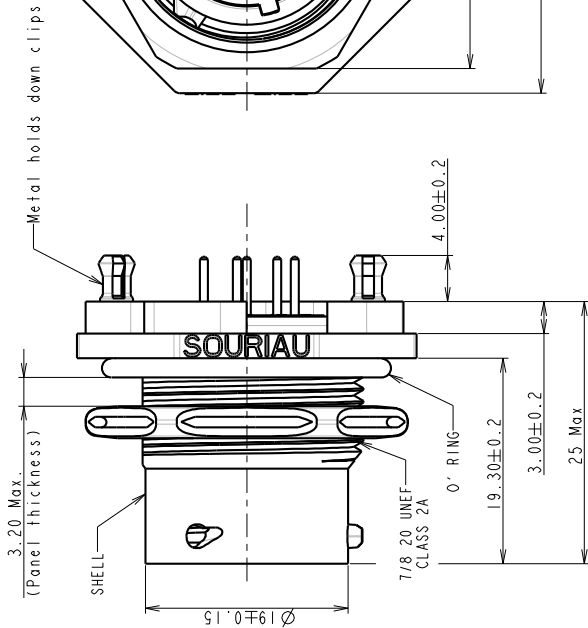

DRILLING PATTERN

MALE CONNECTOR

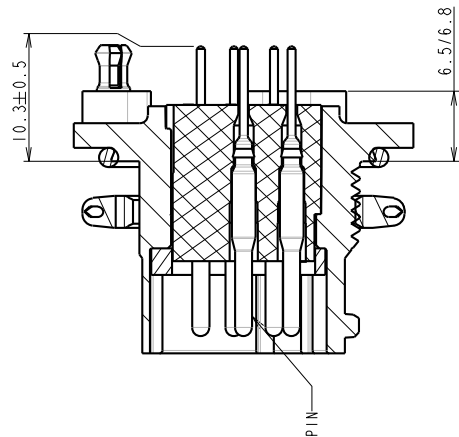

P/N : UTS7128PSEK9

CUSTOMER DRAWING

NOT EXPORT CONTROLLED

B	28/03/07	--	Change dimensions of contact terminations and raising pin	--
ISS	DATE	--	Latest modification - by: ROULLARD Ch	MOD N°
Designed by:	SORIN V.	Date: 26/09/06	Type of drawing: Customer	
Checked by:	SEE DISTRIBUTION LIST	Date: SEE DISTRIBUTION LIST		
TITLE				
JAM NUT RECEPTACLE - 12-8				
UTS CONNECTOR				
Scale	General angular	General linear	Material	--
3/1	Tolerances: ±	Tolerances: ±0.5		
			General mating surface finish	Ro 3.2
				See NF E 04-552
			Geometrical Tolerances	PROJECT
				UTS
				This document is the property of SOURIAU. It must not be reproduced or communicated without permission.
				SOURIAU
				Route Nationale 23
				72500 - MONTAIGNEY
				Tel. : 03 30 02 43 34, 35, 00
				SOURIAU DRG N°
				C012-UTS1-A
FORMAT	A2			SHEET
				1/1

ECHELLE 4/1