


MATERIAL :
 Body : PA 30%GF
 Elastomer link : Elastomer

NOTES :
 -Operating temperature : -40°C up to +105°C
 -This cap is a water and dust protection version
 -Level sealing : IP68 (1bar during 1 week)

PN	A MAX	ØB	ØC ^{+0.2} ₀	mass (gr) ^{±5%}
UTX610DCG	156.1	21	20	7.57
UTX612DCG	161.9	24.5	24	10.08
UTX614DCG	168	27.7	27	14.12
UTX616DCG	160.3	31.1	30.2	16.25
UTX618DCG	165.1	34.03	34.5	19.65

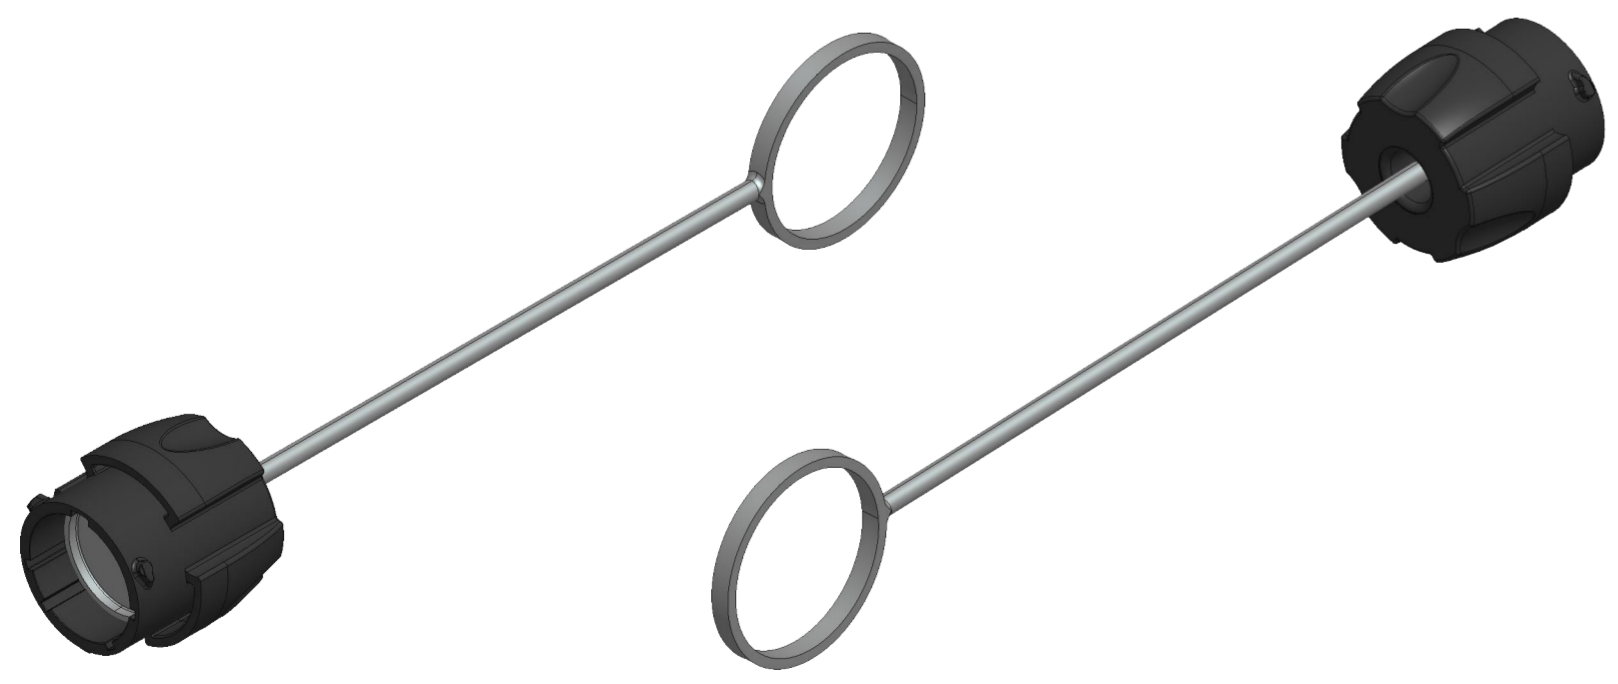

P/N : SEE TABLE

A	27/06/2022	Création First issue	25846X
ISS	DATE	Latest modification - by:	Création MOD N°
Designed by:		BERTELLI.L Date:27/06/2022	CUSTOMER DRAWING
TITLE		PLUG CAPS SIZE 10 TO 18 GBB ACCESSORIES	
Scale 1/1		Dimensions in mm General Linear Tolerances: ± 0.3	NPRDS / PROJECT BE2214.02A
		www.souriau.com	This document is the property of SOURIAU It must not be reproduced or communicated without permission

Country	Jurisdiction & Control List
FR	NOT-LISTED

SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)

FORMAT A2	SOURIAU DRG N° UTGX0025AC	SHEET 1 / 1
--------------	------------------------------	----------------