


UTP Series

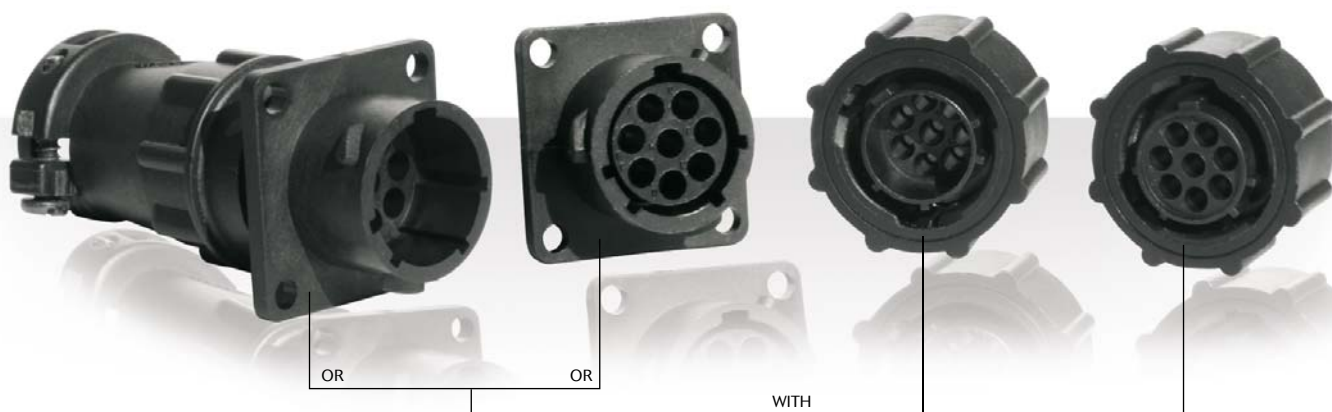

Specifications


Connector type	Shell size	Contacts number*	Part number	
			Male insert	Female insert
Cable plug	10	4	UTP6104P	UTP6104S
			UTP6103P	UTP6103S
	12	8	UTP6128P	UTP6128S
		2 + ground	UTP6122G1P	UTP6122G1S
	14	12	UTP61412P	UTP61412S
	16	19	UTP61619P	UTP61619S
	18	23	UTP61823P	UTP61823S
		6 + ground	UTP6187P	UTP6187S
	20	28	UTP62028P	UTP62028S
Panel mounting receptacle	10	4	UTP0104P	UTP0104S
			UTP0103P	UTP0103S
	12	8	UTP0128P	UTP0128S
		2 + ground	UTP0122G1P	UTP0122G1S
	14	12	UTP01412P	UTP01412S
	16	19	UTP01619P	UTP01619S
	18	23	UTP01823P	UTP01823S
		6 + ground	UTP0187P	UTP0187S
	20	28	UTP02028P	UTP02028S
	22	35	UTP02235P	UTP02235S
	24	48	UTP02448P	UTP02448S

*Contacts supply separately

UTP Series


Dimensions

Cable plug - UTP6

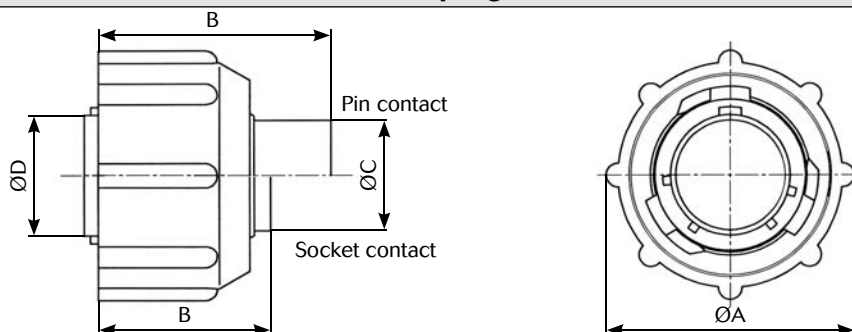

Shell size	$\text{ØA} \pm 0.2$	B max		$\text{ØC} \pm 0.15$	$\text{ØD} \pm 0.15$	$\text{ØE} \pm 0.2$
		Pin contact	Socket contact			
10	26.7	31.8	23.9 / 26.75	10.9	12.2	19.1
12	31.4		23.9	13.8	15.1	
14	34.5			17.0	18.3	
16	37.8			19.9	21.5	
18	40.8	31.8 / 33.0	23.9 / 29.0	22.4	24.0	
20	43.9	31.8	24.9	25.6	27.2	
22	47.0			28.5	30.4	
24	50.1		26.2	31.7	33.5	

Panel mounting - UTP0

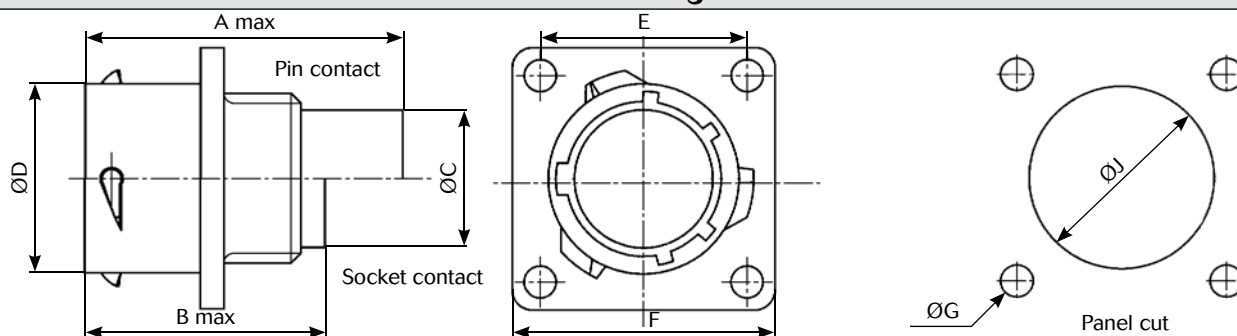

Shell size	A max		B ^{±0.15}	C ^{±0.2}	ØD ^{±0.15}	ØE ^{±0.2}	F ^{±0.25}	ØG ^{±0.1}	ØJ ^{±0.1}
	Pin contact	Socket contact							
10	31.7	24.3 / 27.6	2.3	11.3	15.0	18.3	23.8	3.2	15.1
12		24.3			19.0	20.6	26.2		18.2
14					22.2	23.0	28.6		21.4
16					25.3	24.6	31.0		24.6
18	31.7 / 34.0	24.3 / 30.4	2.5	11.3 / 17.9	28.5	27.0	33.3		27.7
20	33.3	27.0		14.5	31.7	29.4	36.5		30.9
22		28.0	3.5		34.9	31.8	39.7		34.1
24		30.4		15.3	38.0	34.9	42.9	3.9	37.3

Note: all dimensions are in mm